

# Electromagnetic Measurement •

**Product Catalog** 







长沙天恒测控技术有限公司 TUNKIA CO., LTD.



## **Company Profile**

TUNKIA is a global leading manufacturer of high-end electromagnetic measurement & calibration instruments. Its products and technology cover nearly all fields of electromagnetic measurement, and its domestically produced high-end instruments of Class 0.01 or above have an over 80% market share in China. Its business covers more than 50 countries and regions, serving more than 30,000 users around the world, covering national metrology institutions and key laboratories.

Established in 1985, TUNKIA has persisted in investing more than 25% of its annual revenue in research and development, actively responding to various technical challenges in the field of electromagnetic measurement. The company has 400 employees and has established a research institute consisting of more than 120 engineers. It has launched 22 major series and more than 300 models of high-end electromagnetic measuring instruments , which are widely used in calibration, industrial testing, scientific research, etc.

TUNKIA focuses on independent R&D of core technology, and has received certification and honors from authoritative agencies across the world. It has been invited by the International Electrotechnical Commission (IEC) and the Institute of Electrical and Electronics Engineers (IEEE), and has been invited by over ten professional committees such as China Metrology Technical Committee on Electromagnetic and Chinese Society for Measurement.



The company has led or participated in the formulation and revision of 3 international standards and more than 30 national standards or metrological specifications. It has also participated in national key research and development projects and the Chinese government's assistance program for metrology and standard projects in "One Belt One Road" countries. In 2022, it was awarded the title of *National-level Specialized, Sophisticated, New and Distinctive"Little Giant"*, becoming the only company in the field of electromagnetic measurement.

In the future, TUNKIA will strengthen the mutual penetration of cross-fields, continue to expand into the fields of mechanics, quality, and life sciences, and become a world-class provider of comprehensive measurement solutions. It will work with the upstream and downstream of the industry chain to build an instrument ecosystem for precision testing and quality control.















## **COMPANY HISTORY**



#### 1985

Origin of Technology

#### 2006

Established Tunkia Co., Ltd Joined China Metrology Technical Committee on Electromagnetic

#### 2011

Invited to participate in the National Key Technology R & D Program project



#### 2012

Became a member of the Academic Committee of China's Silicon Steel Detection

Became a member of the Board of Directors of China's Amorphous Materials Academic Committee.

#### 2013

Became the Vice Chairman of the Academic Committee of China's Silicon Steel Detection

#### 2014

Started representing China to attend the IEC/TC68 meetings



#### **2015**

Mr. Zhou Xinhua attended the APMP meeting and presented an academic report at the TECM working group.

#### **2016**

Elected as a member of the first Committee of the Non-crystalline Alloy Application Branch of the Chinese Society for Metals.

Participate in Ministry of Science and Technology NOI, Major Instrument Special Project.

- Field calibration technology of EV charging and changing
- Development and Application of Wideband High Current Measuring Instrument
- Development and Industrialization of DC Energy Measuring and Testing Device

# O 2017 Participated in the Chinese government's

Participated in the Chinese government's assistance program for metrology and standard projects in "One Belt One Road" countries.



#### 2018

Became a member of the Electrical Steel Branch of the Chinese Society for Metals

#### 2019

Participated in an international conference organized by the Electromagnetic Professional Committee.





#### 2020

Participated in drafting national standards/metrology regulations.

#### **202**1

Participated in the IEEE Conference -Guide for Testing Equipment for Direct Current Electrical Energy Meters



#### 2022

Continuing to deepen the field of electromagnetic measurements and develop world-class equipment.






## HONOR & CERTIFICATION



National High-tech Enterprise

National-level Specialized, Sophisticated, New and Distinctive "Little Giant" Technology Innovation Center of State Market Regulation Management System







Certification of Intellectual Property Management System
ISO9001 Quality Management System Certification
Environmental Management System Certification
Software Enterprise Certification
Three-level Enterprise of Safety Production Standardization





## 3 International Standards Revision

## 13 National Standards Revision

## **21** Metrological Specifications

International Standard	IEC 61007	Transformers and inductors for use in electronic and telecommunication equipment - Measuring methods and test procedures
International Standard	IEC 63300	Test methods for electrical and magnetic properties of magnetic powder cores
International Standard	IEEE P2960	Guide for Testing Equipment for Direct Current Electrical Energy Meters
National Standard	GB/T 19345.1-2017	Amorphous and nanocrystalline alloys Part 1:Fe-based amorphous soft magnetic alloy strips
National Standard	GB/T19346.3-2021	Methods of measurement of amorphous and nanocrystalline alloys—Part 3: AC magnetic properties of Fe-based amorphous strip using a single sheet specimen
National Standard	GB/T 19289-2019	Methods of measurement of resistivity, density and stacking factor of electrical steel strip and sheet
National Standard	GB/T 10129-2019	Methods of measurement of magnetic properties of electrical steel strip and sheet at medium frequencies
National Standard	GB/T 39042-2020	Measurement of the magnetic properties of electrical steels by means of a single sheet tester. H-coil method
National Standard	GB/T 29318-202X	Electric energy metering for electric vehicle off-board charger
National Standard	GB/T 28569-202X	Electric energy metering for electric vehicle AC charging spot
National Standard	GB/T 3655-2022	Methods of measurement of the magnetic properties of electrical steel strip and sheet by means of an epstein frame



31 Invention Patents 29 Utility Model Patents 13 Design Patents





**76 Software Copyrights** 



## **ACADEMIC ORGANIZATIONS**

IEC/IC68 China Representative

IEC/TC51 Expert IEC/TC66 Expert IEEE PES Power and Energy Society

China Metrology Technical Committee on Electromagnetic

Chinese Society for Measurement

China Instrument Manufacturer Association

China Semiconductor Industry Association (CSIA)

China Electrical Equipment Industry Association

Chinese Society for Electrical Engineering

China Metrology Technical Committee for Photovoltaic Measurement Instruments

Electrical Steel Branch of the Chinese Society for Metals

Non-Crystalline Alloy Application Branch of the Chinese Society for Metals

China Smart Metering Infrastructure Alliance Chinese Technical Committee for Standardization of Electrical Instruments and Meters



## **KEY CUSTOMERS**

#### **Metrology Field**







and Testing Technology



Korea Research Institute of Standards and Science



Vietnam Metrology Institute



Cambodia National Metrology Center



Beijing Institute of Metrology



Shanghai Institute of Measurement and Testing Technology



South China National Centre of Metrology



Hubei Institute of Measurement and Testing Technology



Metrology Science



Shaanxi Institute of Metrology Science

#### **Power Industry**



State Grid Corporation of China



China Southern Power Grid Company Limited



China Energy Investment





China State Power



China Datang Corporation





China General



China Resources



Guohua Power Branch of



State Development & Investment



China Energy neering Group Co., Ltd

#### **Industrial Inspection**



China Baowu Steel Group Corporation Limited



Shougang Group



Group Corporation



BYD



TESLA



HUAWEI





亞中国中年 CRRC











China Railway Engineering Group Limited

CRRC Corporation Limited TBEA Corporation Limited PTTX Corporation Limited

Chint Group

Shanghai Electrical Apparatus Research Institute (Group) Co., Ltd.

MultiDimensiong Technology Co., LTD.

#### **University Research**















Chinese Academy of Sciences

University of Oxford

University of Cambridge

Tsinghua University

Peking University

City University of Hong Kong

Zhejiang University

# ELECTRICAL MEASUREMENT CONTENT

#### l Electrical Multi-function Calibrators

TD1880	Precision Multi-function Calibrator	2
TD1870	Multi-function Calibrator	2
TD1860	Multi-function Calibrator	3
TD1858	Portable Multi-function Calibrator	3
TD1855	Multi-function Calibrator	4
TD1850	Multi-function Calibrator	4
TD1020	Current Coil	4
TD1050	Clamp Meters Calibration Device	5
TD1000	Clamp Meters Calibration Device	5
TD1500	High-precision DC Standard Source	6

#### **Electrical Reference Standards**

TH0100	Advanced DC Voltage Reference Standard	8
TH0104	Advanced DC Voltage Reference Standard	8
TH0110	Programmable DC Voltage Reference Standard	8
TH0150	Wideband Voltage Divider	9
TH0170	Precision DC High Voltage Divider	9
TH0180	Precision AC/DC High Voltage Divider	10
TH0190	Handheld Precision Voltmeter	10
TH0195	AC/DC Voltage Measuring Standard	11
TH0400	Precision Coaxial Current Shunt	11
TH0410	High Frequency Coaxial Shunt	12
TH0420	Reference Coaxial Current Shunt	12
TH0460	Coaxial Shunt Multiplexing Unit	13
TH0470	Precision Wideband Buffer	13
TH0475	High Frequency Voltage Isolation Buffer	14
TH0480	Resistance Time Constant Standard	14
Th0490	Bisector Current Ratio Standard	15
TH0500	Precision Current Transformer	15
TH0540	Precision Current Transducer	16
TH0600	Precision AC Current Transformer	16
TH0680	Multiplexing I/V Selection Units	17
TH0690	Current Transducer Integrated Measurement Analyzer	17
TH0780	Multiplexing V/V Selection Units	18
TH1000	Ultra-stable Precision Current Source	18
TH1200	Nanovoltmeters Calibrator	19
TH2000	Vector Voltage Analyzer	19

#### **3** Resistance Standards

TH0200	Standard Resistance Measuring Device	21
TH0210	Standard Resistance Measuring Device	21
TH0240	Standard Resistance Multiplexer	22
TH0260	Precision Resistance Analyzer	22
TH0300	High Power Resistance Standard	23
TH0310	Resistance Standard	23
TH0320	Reference Resistance Standard	24
TH0340	AC Resistance Standard	24
TH0350	DC Bridges Calibrator	25
TH0360	High-precision DC Resistance Meter Calibrator	25
TD1400	Loop Resistance Tester	26
TD1450	Analog Standard Resistor	26
TD1540	DC Shunt Verification Device	27
TD2100	DC Shunt Verification Device	28

#### 4 AC / DC Current Source & Meters

TH0520	Precision Current & Voltage Measurement Standard	30
TH0530	Precision Through-core Ammeter	30
TH0630	Precision Through-core AC Ammeter	31
TH1300	DC High Current Sensor & Shunt Calibration System	31
TA1000	Transconductance Current Standard Source	32
TA1100	Transconductance Amplifier	32
TA1200	High Frequency Transconductance Amplifier	33
TA1300	AC Current Standard Source	33
TA1500	AC/DC Current Standard Source	34
TD1090	Through-core AC I/V Transformer	34
TD2010	DC High Current Standard Source	35

#### Wideband Power Source & Meters

TA2000	AC Power Calibrator	37
TA2100	Wideband Power Calibrator	37
TA3000	AC Power Measurement Standard	38
TA3100	Wideband Power Measurement Standard	38
TA4300	Power Quality Calibrator	39

#### 6 DC Power & Energy Standards

TH3000	AC/ DC Power & Energy Measurement Standard	41
TH3900	DC Power & Energy Reference Standard	42
TD1300	Precision DC Standard Meter	43
TD1310	Precision AC/DC Standard Meter	43
TD1545	DC Energy Meters Verification Device	44
TD1550	DC Energy Meters Verification Device	45
TD1570	Indirect Connected DC Energy Meters Verification Device	46
TD1575	DC Energy Meters Verification Device	47
TD1580	DC Energy Meters Testing Device	48

#### Single/Three-phase Standard Meters

	TD3100	Single-phase Multi-function Standard Meter	50
ŀ	TD3250	Portable Three-phase Energy Meter Tester	50
	TD3310	Three-phase Multi-function Standard Meter	51
	TD3810	Three-phase Energy Device Field Testing System	51

## Single/Three-phase Energy Meters Verification Device

TD3500	Single-phase Energy Meters Verification Device	53
TD3550	Single-phase Energy Meters Verification Device	54
TD3600	Three-phase Energy Meters Verification Device	55
TD3650	Three-phase Energy Meters Verification Device	56
TD3610	Three-phase Standard Energy Meters Verification Device	57
TD3760	Complex Waveform Testing Device	58
TD4550	Portable Tester for Three-phase Energy Meters	59
TD4100	Portable Tester for Three-phase and DC Meters	59
TD4200	Testing Device for Three-phase and DC Meters	60
TD4500	PortableTester for AC Sampling Devices and Transmitters	61
TD4510	Portable Tester for Three-phase and DC Meters	61
TD4520	Portable Tester for Three-phase and DC Meters	62
TD4530	Portable Tester for Three-phase and DC Meters	62

#### **Electric Vehicle Charging Station Testing**

TD1320	Portable Tester for EV DC Charging Station	64
TD1330	Portable Tester for EV AC Charging Station	64
TK4710	DC Adjustable Resistance Load	65
TK4720	AC Adjustable Resistance Load	65
TK4960	DC Charging-power Calibration Adapter	66
TK4965	AC Charging-power Calibration Adapter	66

#### 10 Safety Instrument Testing

TD1210	Verification Device for Leakage Current Tester	68
TD1220	Verification Device for DC High Voltage & High Value Resistor	68
TD1230	Verification Device for Withstanding Voltage Tester	69
TD1240	Verification Load Bank for Withstanding Voltage Testers	69
TD1250	Verification Device for Earth Continuity Testers	70

#### High Voltage Calibration Instruments

TD2400	AC High Voltage Standard Source	72
TD2410	High Voltage Meters Calibration Device	72
TD2500	DC High Voltage Standard Source	73
TD2550	Non-touch Static Voltmeters Calibration Device	73
TD2600	Precision DC High Voltage Meter	74
TD2650	Precision AC/DC High Voltage Meter	74

## Industrial Instrument Calibration & Testing

TD7500	Process Signal Calibrator	76
TD7600	Precision Process Calibrator	76
TI1000	Precision AC/DC Voltage Calibrator	77
TILLOO	Precision AC/DC Current Calibrator	77
TI1200	Precision DC Resistance Calibrator	78
TI2100	High-stable DC High Current Standard Source	78
TK2600	Pulse Voltage Source	79
TK2650	Pulse Current Source	79
TK6500	Electric Welding Machine AC/DC Power Calibrator	80
TK6700	Electric Welding Machine Calibrator	80
TP1000	Surface Resistance Tester	81
TP2000	Handheld Temperature Humidity Meter	81

#### 13 Medical Metrology

TD7200	Calibrator for Electrosurgical Unit Analyzers	83	
TD7300	Calibrator for Defibrillator Analyzers	83	

## MAGNETIC MEASUREMENT CONTENT

## 1

## Magnetic Parameters Measurement and Calibration

TM6140B	Precision Magnetometer	85
TM7600	Digital Integration Flux Meter	85
TM7900	Precision Volt-second Generator For Flux Meter Calibration	86
TM9000	Calibration System for Magnetometers	86
TM5100	Handheld Tesla Meter	87
TM5100A	Handheld AC Magnetometer	87
TM5120B	Handheld Tesla Meter	88
TM5340B	Handheld Triaxial Tesla Meter	88
TM6100	Gauss Meter	89
TM6160B	AC/DC Tesla Meter	89
TM4100B	Handheld Fluxgate Magnetometer	90
TM4300B	Handheld Triaxial Fluxgate Magnetometer	90
TM4830B	Fluxgate Magnetometer	91
TM7100	Handheld Flux Meter	91
TM7500	Flux Meter	92
TM1100	Hall Probe	92
TM1110	Hall Probe	92
TM1130	Hall Probe	92
TM1200	Fluxgate Probe	93
TM1230	Fluxgate Probe	93
TM2000	Precision Current Source	93
TM2030	Precision Current Source	93
TM2300	Helmholtz Coil	94
TM2330	Helmholtz Coil	94
TM2400	Solenoid	94

#### 2

#### **Magnetic Material Testing Equipment**

TD81Series	AC Magnetic Properties Measuring System for Soft Magnetic Materials	96
TD8160	Magnetic Properties Measuring System for Single Sheet Amorphous	97
TS4000	DC Magnetic Properties Measuring System for Soft Magnetic Materials	98
TS7710	Type A / B Permeameter	99
TS7750	Solenoid	99
TY1000	Magnetic Properties Measuring System for Hard Magnetic Materials	100
TY1100	Magnetic Properties Measuring System for Hard Magnetic Materials	101
TY1500	Electromagnet	102
TY1550	Pole of Electromagnet	103
TY1700	Search Coils	103
TY1900	Specimen Heating Device	104
TY2000	Surface Magnetic Field Automatic Testing System	105
TY2100	Surface Magnetic Field Automatic Testing System	106
TY3000	Magnetic Moment Tester	107
TY3100	High-precision Magnetic Moment Tester	108
TY3300	Magnetic Declination Tester	109

#### 3

#### **Electrical Steel Testing Equipment**

TD9100	Online Testing System for Magnetic Properties of Silicon Strip	111
TS1000	DC Magnetic Properties Measuring System for Electrical Steel	112
TS1020	DC Magnetic Properties Measuring System for Yoke Steel	113
TS1100	AC Magnetic Properties Measuring System for Electrical Steel	114
TS1200	AC Magnetic Properties Measuring System for Electrical Steel	115
TS1300	AC/DC Magnetic Properties Measuring System for Electrical Steel	116
TS2000	Rotational Magnetic Properties Measuring System for Electrical Steel	117
TS2500	Magnetic Properties Measuring System for Electrical Steel Cores	118
TS2600	Iron loss Fast Tester for Electrical Steel Sheets	119
TS3000	Magnetic Properties Multifunction Measuring System for Electrical Steel	120
TS1700	Surface Insulation Resistance Measuring System for Electrical Steel	121
TS1710	Surface Insulation Resistance Automatic Measuring System for Electrical Steel	122
TS1780	Stacking Factor Measuring System for Electrical Steel Sheets	123
TS1800	Bending Testing System for Electrical Steel Sheets	124
TS1810	Bending Automatic Testing System for Electrical Steel Sheets	125
TS7000	Epstein Frame	126
TS7010	Epstein Frame	126
TS7020	Epstein Frame	126
TS7100	Epstein Frame	126
TS7500	Single Sheet Tester	126
TS7510	Single Sheet Tester	126



Calibrators

#### TD1880

## **Precision Multi-function Calibrator**

TD1880 is the most popular type of precision multi-function calibrator with high accuracy . It can calibrate digital multimeters (6  $\frac{1}{2}$  DDM), AC/DC voltmeter, AC/DC ammeter, DC ohmmeter, frequency meter, AC\DC power meters, temperature meters, clamp ammeter, capacitance meters etc.

Accuracy: 10 ppm

DCV Output:  $\pm(0 \sim 1020 \text{ V})$ , AUX  $\pm(0 \sim 7 \text{ V})$ 

DCI Output:  $\pm (0 \sim 20.5 \text{ A})$ ACV Output:  $1 \text{ mV} \sim 1020 \text{ V}$ ACI Output:  $29 \mu \text{A} \sim 20.5 \text{ A}$ RES Output:  $0 \Omega \sim 1100 \text{ M}\Omega$ F Output:  $1 \text{ Hz} \sim 2 \text{ MHz}$ Pulse Output: 2 MHz



#### **TD1870**

## **Multi-function Calibrator**

TD1870 is the cost-effective type of precision multi-function calibrator. It can calibrate digital multimeters (5 % DDM), AC/DC voltmeter, AC/DC ammeter, DC ohmmeter, frequency meter, AC\DC power meters, temperature meters, clamp ammeter etc.



Accuracy: 50 ppm

DCV Output:  $\pm$ (0 ~ 1020 V) DCI Output:  $\pm$ (0 ~ 20.5 A) ACV Output:  $1 \text{ mV} \sim 1020 \text{ V}$ ACI Output:  $29 \mu \text{A} \sim 20.5 \text{ A}$ RES Output:  $0 \Omega \sim 1100 \text{ M}\Omega$ F Output:  $1 \text{ Hz} \sim 2 \text{ MHz}$ 

Pulse Output: 2 MHz

#### **TD1860**

## **Multi-function Calibrator**

TD1860 is a multi-function calibrator with wide range and high stability. It can calibrate digital multimeters (4  $\frac{1}{2}$  DDM), AC/DC voltmeter, AC/DC ammeter, DC ohmmeter, frequency meter, AC\DC power meters, AC/DC transducer, clamp ammeter etc.

Accuracy: 100 ppm

DCV Output:  $\pm(10\text{mV} \sim 1020\text{ V})$ 

DCI Output:  $\pm(3 \mu A \sim 22 A \text{ or } 33 A)$ 

ACV Output: 3 mV ~ 1100 V

ACI Output: 30  $\mu$ A ~ 22 A or 33 A

RES Output: 0  $\Omega$  ~ 220  $M\Omega$ 

F Output: 1 Hz ~ 2 MHz Pulse Output: 2 MHz



#### **TD1858**

## Portable Multi-function Calibrator

TD1858 is a portable multi-function calibrator and very suitable for on-site calibration. It can calibrate digital multimeters (4 % DDM), AC/DC voltmeter, AC/DC ammeter, DC ohmmeter, frequency meter, temperature meters, clamp ammeter etc.





Accuracy: 100 ppm

DCV Output:  $+(10 \text{ mV} \sim 1020 \text{ V}), -(10 \text{ mV} \sim 10.4 \text{ V})$ 

DCI Output:  $\pm$ (10  $\mu$ A ~ 10.2 A) ACV Output: 10 mV ~ 1020 V ACI Output: 10  $\mu$ A ~ 10.4 A RES Output: 1  $\Omega$  ~ 220 M $\Omega$ 

F Output: 1 Hz ~ 2 MHz Pulse Output: 2 MHz

#### TD1850 / TD1855

## **Multi-function Calibrator**

TD1850 Series is a basic yet comprehensive multi-function calibrators with wide range. It can calibrate digital multimeters (3  $\frac{1}{2}$  DDM), AC/DC voltmeter, AC/DC ammeter, DC ohmmeter, frequency meter, AC/DC power meters, AC/DC transducer, clamp ammeter etc.

Accuracy: 500 ppm

DCV Output:  $20 \text{ mV} \sim 1100 \text{ V}$ DCI Output:  $2 \mu A \sim 22 \text{ A} \backslash 33 \text{ A}$ ACV Output:  $20 \text{ mV} \sim 1100 \text{ V}$ ACI Output:  $200 \mu A \sim 22 \text{ A} \backslash 33 \text{ A}$ 

RES Output:  $10 \Omega \sim 220 M\Omega$ 

F Output: 1 Hz ~ 2 MHz Pulse Output: 2 MHz



#### **TD1020**

## **Current Coil**

TD1020 is a series of current coils with equivalent ampere turns method principle, and applied for calibrating clamp ammeters combined with AC\DC standard source.



Equivalent Current Output: 1100 A / 2200 A

Max Current Input: 22 A rms / 44 A rms

DC Accuracy: 0.3%

AC Accuracy: 0.3%@50Hz, 0.5%@400Hz

Frequency: DC, 45 Hz ~ 400 Hz

#### **TD1050**

## Clamp Meters Calibration Device

TD1050 can accurately calibrate multi-function clamp meters by single-turn method. It integrates AC/DC high current standard source, AC/DC voltage standard source, and resistance standard source, and also has AC/DC power output function.

Accuracy: Class 0.05

DCI Output: 10 mA ~ 1050 A/2100 A ACI Output: 10 mA ~ 1020 A/2050 A

DCV Output:  $20 \text{ mV} \sim 1100 \text{ V}$ ACV Output:  $1 \text{ V} \sim 825 \text{ V}$ Frequency:  $40 \text{ Hz} \sim 400 \text{ Hz}$ RES Output:  $10 \Omega \sim 220 \text{ M}\Omega$ 

AC/DC Power Output



#### **TD1000**

## Clamp Meters Calibration Device

TD1000 can accurately calibrate multi-function clamp meters by single-turn method. It integrates AC/DC high current standard source, AC/DC voltage standard source, and resistance standard source.




Accuracy: Class 0.05/Class 0.1 ACI Output: 20 mA ~ 1100A ACV Output: 1 V ~ 825 V DCI Output: 10 mA ~ 22A DCV Output: 20 mV ~ 1100 V Frequency: 45 Hz ~ 65 Hz

RES Output:  $10 \Omega \sim 11M\Omega$ 

#### **TD1500**

## High-precision DC Standard Source

TD1500 is a wide range, multi-function, high-precision DC standard source. It can directly output DC voltage, current, power and energy with high stability and high accuracy, which is suitable for verification or calibration of various types of DC measuring instruments.

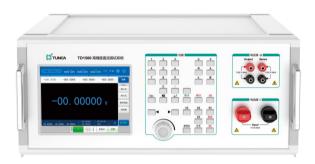

Accuracy: Class 0.01 / Class 0.02 / Class 0.05 DCV Output: 1 mV  $\sim$  1100V/1150 V, 10  $\mu$  V  $\sim$  4.4 V

DCI Output: l  $\mu$  A ~33 A / 120 A DCV Measurement: l0  $\mu$  V ~ 4.4 V Verification of DC electricity meter. Secondary signal measurement of the

transmitter.



#### TH0100 / TH0104

## Advanced DC Voltage Reference Standard

TH0104 is a set of DC voltage reference standards, consisting of four TH0100, which can be used to calibrate precision DC voltage meters or source. It has the characteristics of high stability, high accuracy, high-drive capability, low temperature-drift, small size for easy portability. It is especially suitable for maintaining the traceability of national standards, and transferring it.

Reference DCV Output: 10V, 1V, 0.1V Stability: ±0.3µV/V (10V, 30Days)

With the built-in battery power supply, it can work

continuously for 72 hours.

Strong load capacity, 10V voltage output can drive

a maximum current of 12mA.

Calibrate high-precision multi-function calibrators and digital reference multimeters.



#### **TH0110**

## Programmable DC Voltage Reference Standard

TH0110 is an ultra-precise DC voltage reference with high stability, high accuracy, low temperature drift and small size. It can detect ADC chip linearity, calibrate high-precision DC Voltmeter, the digital nanovoltmeter and the potentiometer.



DCV Output Range: ± (0 ~ 10 V)

Reference DCV Output:  $2.5\,\mathrm{V}$  /  $4.096\,\mathrm{V}$  /  $5\,\mathrm{V}$  /  $10\,\mathrm{V}$ 

Typical short-term stability: 0 2 ppm/min

Resolution: 1 nV (8 bits).





## Wideband Voltage Divider

TH0150 is a set of wideband voltage dividers to realize the voltage measurement of wide frequency or complex waveform, which is suitable for calibrating wideband voltage sources, voltage dividers, transformers and other equipment.

Nominal Voltage Input: 10 V ...1 kV

Nominal Voltage Output: 1 V (customizable)

Frequency: DC ~ 100 kHz

Optimal Proportion Uncertainty of DC: 20 ppm

Optimal AC/DC Difference: 5 ppm@53 Hz Optimal Phase Displacement: 2 µrad@53 Hz



#### **TH0170**

## Precision DC High Voltage Divider

TH0170 can convert DC high voltage to 10 V voltage output, which is matched with high precision digital voltmeter and suitable for the power industry and metering laboratory to establish DC high voltage source/meter calibration and testing standards.





Nominal Voltage Input : 1 kV ... 50 kV Nominal Voltage Output: 10 V

Uncertainty: 30 PPM.

## Precision AC/DC High Voltage Divider

TH0180 is a set of five precision AC/DC high-voltage dividers of different ranges that convert high AC and DC voltages to 5 V output, maintaining accurate proportions and minimal phase shifts. It can establish AC/DC high voltage/current power/energy measurement system.

Nominal Voltage Input: 1 kV ... 35 kV

Nominal Voltage Output: 5 V

Frequency: DC ~ 10 kHz Uncertainty: 30ppm





#### **TH0190**

## **Handheld Precision Voltmeter**

TH0190 is a handheld precision AC current pressure gauge that can accurately measure the range of 20 mV  $\sim$  10 V small-signal voltages, and the AC voltage measurement capability is better than 8 digit semi-high-precision standard digital multimeter.



Frequency: DC, 40 Hz ~ 10 kHz.

DC Measurement Uncertainty : 30 ppm.

AC Measurement Uncertainty : ppm@53 Hz.

2~64th Harmonic Measurement

DC Ripple Measurement Function

## AC/DC Voltage Measuring Standard

TH0195 can measure AC voltage of 7  $\frac{1}{2}$  digit multimeter. It accurately measures small voltage signals from sensors/transformers (current output type can be converted to voltage by resistance), coaxial shunts, and other equipment, to measure AC and DC high current or high voltage.

Voltage Measurement :  $10 \text{ mV} \sim 7 \text{ V@AC}$ ,  $10 \text{ mV} \sim 10 \text{ V@DC}$ 

Frequency: DC, 1 mHz ~ 10 kHz.

Accuracy: ± (0.003% \* reading + 0.001% \* range) @ 3V.

2<sup>nd</sup> ~ 128<sup>th</sup> Harmonic Measurement

DC Ripple Measurement Function





#### **TH0400**

## **Precision Coaxial Current Shunt**

TH0400 is a series of 14 precision coaxial shunt devices of different range. It can measure wideband current ,which is suitable for calibrating wideband current/power source, transformers, sensors, etc.









Frequency: DC  $\sim$  100 kHz

AC/DC Difference: 30 ppm@53 Hz Optimum phase displacement: 5 µrad Nominal Current Input: 1 mA ...100 A

Nominal Voltage Output : 1 V (customizable) Annual Variation: typical 5 ppm, max18 ppm

#### **THO410**

## **High Frequency Coaxial Shunt**

THO410 is a set of nine precision AC/DC shunts of different ranges. It can be used in voltage high-speed sampling system or with high-precision meter, to measure wideband or complex waveform current or calibrate wideband current sources, transformers, sensors, etc.

Frequency: DC ~ 1 MHz

AC/DC Difference: 30 ppm @53Hz Optimal Phase Displacement: 5 µrad Nominal Current Input: 20 mA ...10 A

Nominal Voltage Output : 1 V (customizable) Annual Variation: typical 5 ppm, max 18 ppm



#### **TH0420**

## Reference Coaxial Current Shunt

TH0420 is a set of ten precision coaxial shunts with ultra-low power coefficients. Such as TH0420-100A even under 100 W power conditions, its power coefficient is not more than 10 PPM, very suitable for a wide range of AC and DC current rapid measurement.



Frequency: DC ~ 100 kHz

AC/DC Difference: 5 ppm @53Hz; 10 ppm @1kHz;

25ppm @100 kHz

Optimal Phase Displacement: 5 µrad

Nominal Current Input: 0.1A...100A (customizable)

Nominal Voltage Output: 1 V or 0.5 V

Annual Variation: typical 5 ppm, max 16 ppm

Ultra Low Power Factor

## **Coaxial Shunt Multiplexing Unit**

A precise and efficient channel selection/switching device for coaxial shunt. Using super sensitive, high efficiency, polarization sealed relay technology, so as to eliminate relay effect of the apparatus itself.

Frequency: DC ~ 100 kHz

AC/DC Difference: 30 ppm @53Hz Optimal Phase Displacement:  $5 \mu rad$  Nominal Current Input:  $1mA \sim 20 A$ 

Nominal Voltage Output: 1 V

Annual Variation: typical 5 ppm, max 16 ppm

Ultra Low Temperature Coefficient, Power Coefficient



#### **THO470**

## **Precision Wideband Buffer**

TH0470 is a precision buffer that converts high internal resistance signals into low-impedance outputs, with good AC/DC difference and phase displacement performance, suitable for precision measurement of voltage, current, phase, power and other electrical parameters in wideband.



Typical AC/DC Difference: 3 ppm Typical Phase Displacement: 3 ppm Maximum Frequency:  $100 \, \text{kHz/1 MHz}$  Impedance Input:  $10 \, \text{M}\Omega \, \text{//} \, 20 \, \text{pF}$ 

Voltage Input : 7 V

Gain Value: 1

#### **THO475**

## High Frequency Voltage Isolation Buffer

TH0475 is a precision buffer that is specifically designed to convert high-impedance signals to low-impedance outputs. It has excellent AC-DC coupling and phase displacement performance, and is an essential instrument for the output of voltage-to-voltage (V/V) and current-to-voltage (I/V) precision converters.

Maximum Frequency: 100kHz~1MHz

Impedance Input :  $5 M\Omega$ 

Voltage Input: 0.05Vrms ~ 1.2Vrms

Gain Value: 1





#### **TH0480**

## **Resistance Time Constant Standard**

A time constant resistance standard, nominal resistance  $1\Omega$ , nominal output voltage 1V. It has good AC/DC difference and phase displacement index, and time constant calibration uncertainty reaches 0.1ns.







Typical AC/DC Difference: 1 ppm Typical Phase Displacement: 1µrad

Frequency: DC, 50Hz - 100 kHz Maximum working current: 2A

Resistance Time Constant: better than 5ns

## **Bisector Current Ratio Standard**

TH0490 is a series of bisector current ratio standards. It can divide the input wideband current into two equal parts before output. The ratio difference and phase displacement of the second current are very small.

Nominal Current Input: 2A/20 A
Frequency Range: 45Hz~100 kHz
Amplitude Error: better than 10ppm
Phase Angle Error: better than 20µrad



#### TH0500

## **Precision Current Transformer**

TH0500 is a series of precision current conversion standards that use precision DC current comparator to convert AC/DC currents ( $0.1\,\mathrm{A} \sim 20\,\mathrm{kA}$ ) into small-signal voltage or current. The secondary output can be connected to corresponding measuring instruments to achieve various measurement applications.





Direct connected type with the input current of 0.1 A...200 A.

Through-core type with the input current of 500 A...20 kA.

Secondary output signal is optional for current (I/I) or voltage (I/V)

I/I: Optimum uncertainty of 0.2ppmI/V: Optimum uncertainty of 10 ppm

Frequency: DC, 10Hz - 5 kHz

## **Precision Current Transducer**

TH0540 is a series of I/I type precision AC/DC current transducer, which have the good linearity, low zero drift, fast response, and low temperature influence coefficient. It can expand the current measurement range of the instrument, realize the precise conversion measurement of AC and DC current.

Direct connected type with the input current of IA... IkA.

Through-core type with the input current of 200 A... 2 kA.

DC Uncertainty: 5 ppm

AC Uncertainty: 200 ppm@53 Hz

Frequency: DC~ 5 kHz



#### **TH0600**

## **Precision AC Current Transformer**

TH0600 precision AC current transformer is based on wideband current transformer technology. It can convert nominal current from 0.1 A to 10 kA AC current into a voltage or current output in a certain proportion and maintains a high proportion uncertainty.



Direct connected type with the input current of 0.1 A... 200 A

Through-core type with the input current of 500 A... 10 kA.

The secondary output signal is optional for voltage (I/V) or current (I/I).

Type I/I: Optimal ratio uncertainty of 5 ppm

Type I/V: Optimal ratio uncertainty up to 10 ppm

Frequency: 40 Hz~2.5 kHz.

## Multiplexing I/V Selection Units

TH0680 is a high-precision line frequency current converter, equipped with multiple gear precision transformers and precision resistors, which can convert line frequency current into a 1V voltage signal output, and achieve precision measurement of line frequency current or traceable calibration of current source.

Frequency: 45 Hz ~ 65 Hz

Nominal Current Input: 0.5 A ~ 100 A

Nominal Voltage Output: 1 V

Uncertainty: 5 ppm.



#### **TH0690**

# Current Transducer Integrated Measurement Analyzer

TH0690 is an intelligent instrument designed for the comprehensive performance evaluation of current transformers. It can accurately detect the electrical characteristics such as the ratio error (k) and phase displacement ( $\delta$ ) of I/I and I/V type current transformers. It can also measures the AC magnetic characteristics of the transformer core.



Frequency: 45 Hz ~ 65 Hz

Accuracy: 50 ppm

Drawing current or frequency characteristic

curve through software

Multi-frequency point measurement of ratio

error and phase displacement

Multiple parameters of the magnetic properties measurement and curve drawing.

## Multiplexing V/V Selection Units

TH0780 is a high-precision power frequency voltage converter with a built-in multi-range precision voltage transformer. It can convert high power frequency voltage to IV output voltage signals, enabling precise measurement of power frequency voltages or source voltage traceability calibration.

Frequency: 45 Hz ~ 65 Hz

Nominal Voltage Input: 60V ~ 480V

Nominal Voltage Output: 1 V

Uncertainty: 5 ppm.





#### TH1000

## **Ultra-stable Precision Current Source**

TH1000 is a precision DC current standard source, which is a constant current source with ultra-low noise, high precision, high linearity, and better adjustment fineness.



Optimal Uncertainty: ± 15 µA/A

DCI Output: ±(0~110 mA)

Maximum Load Voltage: 10 V

Rise time < 10 ms, built time < 20 ms.

Constant Current Output Ripple Factor: <0.001%

## Nanovoltmeters Calibrator

TH1200 is an instrument that uses the standard source method to calibrate the nanovoltmeter. It is equipped with a highly stable voltage reference standard and has extremely low temperature drift. This product is characterized by low noise, high accuracy, high resolution, and low temperature drift.

Standard voltage output  $l\mu V\sim llOV$ 

Uncertainty: 6 ppm@10 V

Typical Stability at mV Output: 10 nV/min

8-digital, Minimum Resolution: 1 nV

Constant Temperature Control Technology





#### TH2000

## Vector Voltage Analyzer

TH2000 is a high-precision vector voltage analyzer, measuring the ratio error and phase displacement between two channel voltage. It also testing various electrical parameters, such as voltage, current, frequency, phase, harmonic, power, etc., TH2000 is suitable for wideband electrical measurement scenarios.



Dual channel voltage measurement:  $0.5 \, \text{mV} \sim 6 \, \text{V}$ 

Frequency: DC, AC 10 Hz ~ 20 kHz

Uncertainty of voltage and power: 50ppm and

100ppm

Uncertainty of phase displacement: 0.0005°

2nd~256th Harmonics Measurement

Display harmonic content, total harmonic

distortion and spectrum diagram.



## Standard Resistance Measuring Device

TH0200 is a resistance measuring device with high precision and wide range, it's applied for the measurement, comparison, transmission, verification of standard resistance by using DC comparator Bridge.

Current Output:  $10 \mu A \sim 10 A$ .

Resistance Measurement: l m $\Omega$  ~ 100 k $\Omega$ 

(customizable).

Uncertainty: 10 ppm.

Built in standard resistance for reference.

Measurement mode: Precision / Quick.



#### **TH0210**

## Standard Resistance Measuring Device

TH0210 is a DC comparator bridge designed for the automatic measurement and display of the ratio of two resistances to high accuracy. It's applied for the measurement, comparison, transmission, verification of standard resistance.





Current Output: 100 µA ~ 3.2 A

Resistance Measurement:  $1 \text{ m}\Omega \sim 100 \text{ k}\Omega \text{ (customizable)}$ 

Uncertainty: 0.5 ppm ~ 3 ppm(External Primary Standard Resistor)

Test Period: about 4.5 minutes

## Standard Resistance Multiplexer

TH0240 is a precise resistance channel-switch device, integrates ultra sensitive, high efficiency, polarized sealed relay, which can eliminate the self-heating effect in the relay. It has ultra-low thermal potential and contact resistance.

10 channels 4-wire terminals.

Sealed Relays with 3 A Carrying Capacity.

Copper Tellurium Terminal.

Insulation Resistance> 10<sup>12</sup>.





#### TH0260

## **Precision Resistance Analyzer**

TH0260 is a measuring instrument used to analyze the characteristics of DC precision resistance. It's applied for resistance manufacturers to perform detailed performance analysis.



TH0260-H



TH0260-L

TH0260-L (low value)/TH0260-B (high value):

Maximum Current Output: 100 A/100 mA

Maximum Voltage Test: 20 V/1000 V

Measuring Range:  $100~\mu\Omega\sim10~k\Omega/100~\Omega\sim1~G\Omega$  (customizable)

Uncertainty:3 ppm

Test Items: short-term overload, long-term life, power factor, thermoelectric potential.

# High Power Resistance Standard

TH0300 is a series of reference high power resistance standards, it's applied for precise AC and DC current measurement at high power conditions.

Nominal Resistance:  $0.1~\Omega \sim 10~\Omega$ Maximum Operating Current: 11~ALong-term Stability: 5~ppm/yearTemperature Coefficient:  $1~ppm/^{\circ}C$ Low Thermoelectric Potential Terminal



#### **TH0310**

### **Resistance Standard**

TH0310 is a series of precision standard resistors, suitable for measuring a wide range of precision current, it can also be applied for calibrating multi-function calibrators, high precision digital multi-meter, etc.



Nominal Resistance: l m ~100 M $\Omega$  (customizable)

Long-term Stability: 5 ppm/year (typical)

Temperature Coefficient: 1 ppm/°C Low Thermoelectric Potential Terminal

### Reference Resistance Standard

TH0320 is a series of precision standard resistors, suitable for measuring a wide range of precision current, it can also be applied for calibrating multi-function calibrators, high precision digital multi-meter, etc.

Nominal Resistance:  $1 \sim 10 \, M\Omega$  (customizable) Long-term Stability:  $3 \, ppm/year$  (typical) Temperature Coefficient:  $0.2 \, ppm/^{\circ}C$ Low Thermoelectric Potential Terminal



#### **TH0340**

### **AC Resistance Standard**

TH0340 is a series of reference temperature-controlled AC resistance standards. It's suitable for calibrating AC impedance meters (LCR).



Nominal Resistance:  $1\,\Omega\sim10\,k\Omega$  Long-term Stability:  $5\,ppm/year$  Temperature Coefficient:  $0.2\,ppm/^{\circ}C$ 

Battery Supply

# **DC Bridges Calibrator**

TH0350 is a precision DC Bridges Calibrator with wide range of analog resistance. It can calibrate Resistance instruments of class 0.02 and below, including single and double arm bridges, digital bridges, digital micro-ohmmeter and DC resistance meters.

DCI Measurement: 1 mA~11A

Resistance Analog Range:  $100 \mu\Omega$ ~ $11 M\Omega$ 

Uncertainty: 50 ppm

Adjustment Fineness:  $5n\Omega$ 

2-wire and 4-wire Resistance Modes



#### **TH0360**

# High-precision DC Resistance Meter Calibrator

TH0360 can simulate wide range of DC standard resistances, and calibrate single-arm bridges, double-arm bridges, high-precision DC resistance meters, and digital micro-ohmmeters.





DCI Measurement: 20 mA~ 22 A

Optimal Measurement Uncertainty for Current: 40 ppm

Resistance Analog Range: 0  $\Omega \sim 1.1 \, \text{G}\Omega$ 

Optimal Measurement Uncertainty for Resistance: 20 ppm

2-wire and 4-wire Resistance Modes

# **Loop Resistance Tester**

TD1400 is a portable instrument dedicated to measuring the loop resistance and contact resistance of switches, circuit breakers, copper-aluminum busbars and other equipment, with an accuracy of Class 0.2/ Class 0.5 available.

Resistance Measurement:  $0.01 \,\mathrm{m}\Omega \sim 180 \,\mathrm{m}\Omega$ ;

DCI Output: 2A~100A /200 A ACV Input: 198 V ~ 253 V

Built-in micro printer for on-site printing of

test results.





# **Analog Standard Resistor**

TD1450 is an instrument that accurately simulates DC or AC standard resistance, and is suitable for calibrating loop resistance testers, DC resistance testers, ground on-resistance testers, and other DC or AC low impedance instrument.





Accuracy: Class 0.02/Class 0.05


Maximum current measurement: 60 A /120A/240A/ 600A

DC Resistance Analog:  $1~\mu\Omega\sim200~\Omega$  AC Resistance Analog:  $30~\mu\Omega\sim150~\Omega$ 

Current Ripple or Harmonic Measurement Function

### **DC Shunt Verification Device**

TD1540 is a set of instrument specially used for calibrating DC shunt, which is composed of DC standard large current source and precision DC voltmeter. It has wide measuring range, high precision, high stability and good safety performance.

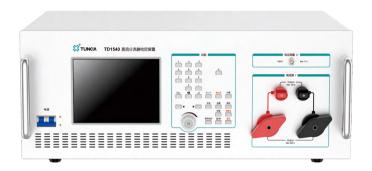

Accuracy: Class 0.02 / Class 0.05

DCIOutput:  $1 \text{mA} \sim 600 \text{ A}$ 

DCV Measurement:  $10 \,\mu V \sim 11 \,V$ 

Resistance Measurement: 200 n $\Omega$ ~6  $\Omega$ 

Measuring resistance, basic error, and drawing R (t), R (I) curve.

Professional Test Software

### **DC Shunt Verification Device**

TD2100 is a device specially used to quickly verify DC shunt. It adopts modular design and is composed of multi meter position verification platform, DC high current standard source, precision DC voltmeter, multi-function measurement and control unit, verification software, etc.



Accuracy: Class 0.02 / Class 0.05

DCI Output: 0.5 A ~ 600 A

DCV Measurement: 100 µV~ 11 V

Resistance Measurement: 200 n $\Omega$ ~6  $\Omega$ 

3/6 Meter Positions Test Bench

Shunts Manual/Automatic Crimping Device

Measuring resistance, basic error, and drawing R (t), R (I) curve.

Temperature Measurement, recording the highest temperature point and thermal balance time of the shunt.



### Precision Current & Voltage Measurement Standard

TH0520 is a Current and Voltage Measuring instrument that directly measures currents up to 2 A or voltage to  $10.5 \, \text{V}$ , mated to precision I/V, V/V conversion standards, current sensor can be set AC DC high current or high voltage measurement system.



DCI Measurement: 10 µA~2 A (Uncertainty: 50 ppm)

DCV Measurement: 10 mV~10.5 V (Uncertainty: 30 ppm)

Frequency: DC, 40 Hz~5 kHz

Equipped with a dedicated current sensor measurement interface.

Set the sensor ratio to directly display the primary charge.

Support DC Ripple, 2<sup>nd</sup>~64<sup>th</sup> Harmonic Measurement

**TH0530** 

# **Precision Through-core Ammeter**

TH0530 is a wide measurement range, high measurement accuracy, small and portable ammeter, using wideband current comparator technology, suitable for measuring wideband high current in the field, or for calibrating AC and DC high current sources and ammeters.





Max Current Measurement: 1 kA/2 kA

Frequency: DC ~ 1 kHz

Accuracy: Class 0.005 / Class 0.01

Through-core and Direct Measurement

The aperture of 70 mm

Analog I/V output mode is supported

# Precision Through-core AC Ammeter

TH0630 is a wide measurement range, high measurement accuracy, small and portable AC ammeter, using wideband current transformer technology, suitable for measuring AC high current in the field, or for calibrating AC current sources and ammeters.

Max Current Measurement: 1 kA/2 kA

Frequency: 40 H z ~ 400 Hz

Accuracy: Class 0.005/Class 0.01

AC Harmonics and Distortion Measurement

Display of Current Waveform And Spectrogram





#### TH1300

### DC High Current Sensor & Shunt Calibration System

TH1300 can be fully automatic programmable output high precision, high stability, wide range of DC current, which can calibrate DC shunts and high-precision current sensors. It provides a reliable technical guarantee for the establishment of high-precision current and resistance transmission system for high-level metrology laboratories.



Bipolar High Current Source: 0.1 mA~10 kA

High Stability and Accuracy: the shortterm stability can reach 2.5ppm/min, 8ppm/h; Absolute accuracy of ±50 μ Α/Α.

Calibrating DC shunts with resistance value of 0.1  $\mu\Omega$ ~100  $k\Omega$ 

Automatic calibration, saving of the original data and export/printing of calibration certificate.

### Transconductance Current Standard Source

TA1000 is a high-precision and high-stability wideband current source. It can output wideband current with the built-in signal generator directly. It can also be used as a wideband transconductance amplifier to accept AC/DC Voltage/current signals from any calibrator, signal generator or power supply.

Accuracy: Class 0 .01 Frequency: DC ~ 10 kHz

Maximum Current Output: 120 A Short-term Stability: 0.001%



#### **TA1100**

# Transconductance Amplifier

TAll00 is a high-precision, high stability wideband current standard source, with built-in signal generator, which can directly output wideband current. It can also be used as a wideband transconductance amplifier to receive AC and DC voltage signal input from any calibrator, signal generator or power supply, and transconductance output wideband current.





Accuracy: Class 0.05
Frequency: DC ~ 100 kHz
Maximum Current Output: 100 A
Short-term Stability: 0.004%
Maximum Compliance Voltage:
7 Vrms @ AC, 7 V @ DC

# High Frequency Transconductance Amplifier

TAl200 is a high-precision, high-stability wideband constant current source with a frequency of up to 1 MHz and a linear output of current in a transconductance mode of operation, suitable for calibrating the frequency response bandwidth characteristics of high frequency current transducers or testing current transducers.

Current output range I mA to 10.5 A

Frequency: DC & 10 Hz to 1 MHz

Short-term Stability: 0.004%/min @ DC, 0.05%/min @ 100 kHz, 0.1%/min @ 1 MHz

Operation mode: constant current (CC) and

transconductance (TA)

Voltage Input at TA mode: 0.2 V to 2 V


Maximum Load Voltage: 7 Vrms



#### **TA1300**

### **AC Current Standard Source**

TAl300 is a series of AC current standard source devices, which can output high stability and high accuracy AC high current, suitable for calibrating AC ammeters, current transformers, current sensors and other equipment.



Supports combined outputs from multiple module sources up to 6 kA.

Maximum Fundamental Frequency: 65 Hz / 400 Hz / 1kHz optional.

Accuracy: Class 0.02 / Class 0.05

Harmonic Output Function

### **AC/DC Current Standard Source**

TA1500 is a series of AC current standard source devices, which can output high stability and high accuracy AC current large current, suitable for calibrating AC current ammeters, current transformers, Current sensors and other devices.

Supports combined outputs from multiple module sources up to 6 kA.

Frequency: DC, 10 Hz ~ 65 Hz/400Hz/1kHz

Accuracy: Class 0.02/ Class 0.05

Bipolar DC current

Harmonic Output Function



#### TD1090

# Through-core AC I/V Converter

TD1090 through-core AC I/V converter uses the through-core measurement method to convert AC high current into small voltage, realizing accurate measurement of AC high current, which can be applied to calibrating AC high current sources, current transformers and other devices.



Nominal current input: 1 kA or 2 kA

Nominal voltage output : 1 VFrequency:  $40 \text{ Hz} \sim 400 \text{ Hz}$ 

Accuracy: Class 0.005/ Class 0.01

The primary input is electrically isolated from

the secondary output.

# DC High Current Standard Source

TD2010 is a set of DC high current standard source equipment, using modular design, multiple current output units in parallel, which has high accuracy, good stability, high reliability. It can calibrate and measure DC current sensor/shunt.



Support multiple module source superposition output, current output up to 15 kA.

Accuracy: Class 0.01/ Class 0.02/ Class 0.05

Typical Peak Stability: 15 ppm/h, Variance Stability: 6 ppm/h

DCV Measurement: ±(10mV~12V)
DCI Measurement:±(1 mA~1.1 A)



### **AC Power Calibrator**

TA2000 is a high-precision AC power source with wide range, which is applied for calibrating AC power meters. The optional electrical energy function can be used for testing single-phase AC energy meter.

Accuracy: Class 0.02/Class 0.05

ACV output: 0.3 V ~ 1100 V ACI output: 0.3 mA ~ 110 A AUX output:  $0.5 \, \text{mV} \sim 5.5 \, \text{V}$ 

Frequency: 40 Hz ~ 70 Hz/1500 Hz



#### **TA2100**

### Wideband Power Calibrator

TA2100 is a wide range, high-precision, high-stability wideband power calibrator, the instrument can output DC voltage, current and power, and has a dual voltage output mode, suitable for calibration power analyzer, AC / DC power meter, voltmeter, ammeter and other electrical measuring instruments.



Power Accuracy: Class 0.05

ACV / DC V Output : 0.3 V ~ 1020 V

ACI / DCI Current Output: 0.5 mA ~ 20.5 A

AUX output:  $2.5 \, \text{mV} \sim 5.5 \, \text{V}$ Frequency: 5 Hz ~ 100 kHz

### **AC Power Measurement Standard**

TA3000 is a high-precision wideband AC parametric measurement standard that simultaneously measures multiple amounts of electricity in an AC loop such as: voltage, current, frequency, phase, harmonics, active power/energy, reactive power/energy, apparent power, power factor, etc.

Uncertainty: Class 0.01

Voltage Measurement : 1 V~600 V Current Measurement e: 10mA~120 A

Frequency: 45 Hz~1 kHz.

Phase Uncertainty: 0.003°

2<sup>nd</sup>~127<sup>th</sup> Harmonic Measurement

Standard Energy Pulse Input/Output





#### **TA3100**

### Wideband Power Measurement Standard

TA3100 is a high-precision wideband AC parametric measurement standard, which can simultaneously measure multiple amounts of electricity in the AC loop such as: voltage, current, frequency, phase, harmonics, active power/electrical energy, reactive power/energy, apparent power, power factor, etc. It can be used with TA2100 Wideband Power Calibrator to calibrate medium and high precision power analyzers



Uncertainty: Class 0.015

Frequency: DC, AC 10 Hz~100 kHz.
Voltage Measurement: 0.3 V~1020 V.
Small Voltage Measurement: 2.5 mV~6 V.

Voltage Measurement: 1 mA~20.5 A

### **Power Quality Calibrator**

TA4300 is a 3PH power quality calibrator. It integrates voltage/current output function, harmonic function, AC power output function, AC energy test function. It can test voltage fluctuate, flicker, harmonic, inter-harmonic, voltage swell, voltage dip and 3PH imbalance for power quality analyzer.





3PH Voltage Output: 1 V~528 V

3PH Current Output: 0.2 mA~22 A

Frequency: 45 Hz~65 Hz/400 Hz

U-I phase: 0°~360° Accuracy: Class 0.02

Harmonic: 2<sup>nd</sup>~99<sup>th</sup> output

Inter-harmonic: 0.1~99.9 times output

Energy Pulse Input/Output



# DC Power & Energy Standards

# AC/ DC Power & Energy Measurement Standard

TH3000 is a high-precision, wide-range, multi-functional AC and DC power standard, the instrument integrates AC and DC standard voltage\current\small-signal voltmeter, AC/DC energy measurement, ripple measurement, harmonic measurement and other functions.



Accuracy: Class 0.005

DCV measurement:  $10 \text{ mV} \sim 1150 \text{ V}$ DCI measurement:  $10 \mu \text{ A} \sim 120 \text{ A}$ 

Support the transducer to expand the current

range to 500 A or more

Small-signal DCV measurement:  $0.1\,\mathrm{m}\,\mathrm{V}\sim12\,\mathrm{V}$  DC Ripple, AC  $2^{\mathrm{nd}}\sim63^{\mathrm{rd}}$  Harmonic Measurement

# DC Power & Energy Reference Standard

TH3900 is a DC energy reference device with an optimal measurement uncertainty of 10 ppm for power/energy. It has the characteristics of high stability, high accuracy, strong functionality and low temperature drift.



DCI Max Measurement: 600A, Uncertainty: 6 ppm DCV Max Measurement: 1.15kV, Uncertainty: 8 ppm

Voltage Stability: 6 ppm/min, Current Stability: 8 ppm/min

Small-signal Voltage with a Minimum Output of 0.1 mV and an Uncertainty of 15 ppm

BI/V and V/V Conversion Standards Uncertainty: 3 ppm Solid State Voltage Reference Annual Variation:  $\pm 1.5 \, \mu V/V$ .

Quantum Voltage Calibration Function

High Precision Constant Temperature Crystal Oscillator, Standard Second Pulse Uncertainty up to 0.5 ppm

### **Precision DC Standard Meter**

TD1300 is a DC standard meter, which integrates DC standard voltmeter, DC standard ammeter, small-signal voltmeter, DC energy measurement, ripple measurement and other functions. It is applicable to calibration of DC source and assessment of DC energy metering device.

Accuracy : Class 0.01/Class 0.02 DCV measurement:  $10 \, \text{mV} \sim 1150 \, \text{V}$  DCI measurement:  $10 \, \mu\text{A} \sim 120 \, \text{A}$ 

Support the transducer to expand the current range to 500 A or more

10 000 / (01 111010

Small-signal DCV measurement:  $0.1 \,\text{mV} \sim 12 \,\text{V}$ 

Maximum DC Ripple Measurement Bandwidth: 10 kHz.

Standard Energy Pulse Input / Output



**TD1310** 

### Precision AC/DC Standard Meter

TD1310 is an AC/DC standard meter, which integrates AC/DC standard voltmeter, AC/DC standard ammeter, small-signal voltmeter, AC/DC energy measurement, ripple measurement, harmonic measurement and other functions. It is applicable to calibration of AC/DC source and assessment of AC/DC energy metering device.





Power/Energy Accuracy: DC Class 0.01, AC Class 0.02 Voltage/Current Accuracy: DC Class 0.005, AC Class 0.01 DCV Measurement:  $10 \text{ mV} \sim 1150 \text{ V}$ ,  $0.1 \text{ mV} \sim 12 \text{ V}$ (Small-signal)

DCI Measurement:  $10 \mu A \sim 120 A/500A$  (transducer)

DC Ripple and AC 2<sup>nd</sup>~63<sup>rd</sup> Harmonic Measurement

Comprehensive Statistics and Analysis of the Measured Electricity

Standard Electric Energy Pulse Input/Output

### **Precision DC Standard Meter**

TD1545 is a multi-functional instrument dedicated to the verification and calibration of DC meter. It consists of DC voltage standard source, DC current standard source, DC small-signal voltage source, DC standard virtual power source etc. It can verify DC voltmeter / ammeter / power meter, DC shunt, and DC energy meters.





Accuracy: Class 0.01/Class 0.02

DCV Output:  $10 \text{ mV} \sim 1150 \text{ V} / 1550 \text{ V}$ ,  $10 \mu \text{V} \sim 4.4 \text{ V} \text{(small-signal)}$ 

DCIOutput: 1mA~600A

Standard Electric Energy Pulse Input/Output

Portable and easy to integrate into the cabinet to form a test system

Secondary signal measurement of transmitter

# DC Energy Meters Verification Device

TD1550 is a platform device that can be used for the verification of DC energy meter and DC shunt. It consists of DC voltage/current standard source,DC voltmeter, multi position verification platform, verification software, etc. It can verify DC electrical measuring instruments, DC shunt, and DC energy meters.



Accuracy: Class 0.02/ Class 0.05

DCV Output:  $10 \text{ mV} \sim 1150 \text{ V} / 1550 \text{ V}$ ,  $10 \mu\text{V} \sim 4.4 \text{ V} (\text{small-signal})$ 

DCIOutput: 1mA~600A

Optional 3 or 6 Meters Position

Standard Energy Pulse Input/Output

Auxiliary Power Supply for DC Energy Measuring

Test the Daily Timing Error of the Energy Meter

DC Shunt Manual/Automatic Crimping Device

### Indirect Connected DC Energy Meters Verification Device

TD1570 is a device dedicated to the verification of indirect connected DC energy meters, which is composed of DC standard voltage source, DC small-signal voltage standard source, multi meter location verification platform, verification software, etc. It supports the automatic verification of indirect connected DC energy meters.



Accuracy: Class 0.05

DCV Output:  $10 \text{ mV} \sim 1150 \text{ V} / 1550 \text{ V}$ ,  $10 \mu\text{V} \sim 4.4 \text{ V} \text{(small-signal)}$ 

Optional 6/12/16 Meters Position


Standard Energy Pulse Input/Output

Auxiliary Power Supply for DC Energy Measuring

Test the Daily Timing Error of the Energy Meter

# DC Energy Meters Verification Device

TD1575 is a platform device dedicated to the verification of DC energy meters, which consists of DC voltage standard source, DC current standard source, DC small signal voltage standard source (corresponding to the voltage of the shunt), multi meter position verification platform, verification software, etc. Support verification of direct connected and indirect connected DC energy meters at the same time.

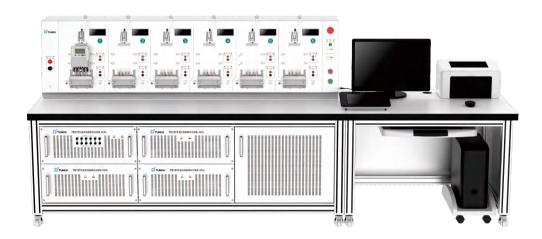

Accuracy: Class 0.02 / Class 0.05

DCV Output:  $10 \text{ mV} \sim 1150 \text{ V} / 1550 \text{ V}$ ,  $10 \mu\text{V} \sim 4.4 \text{ V} \text{(small-signal)}$ 

DCI Output: 20 µA~120 A

Optional 6/12/16 meters position indirect connected DC energy meters verification platform.

Standard Energy Pulse Input/Output

**Auxiliary Power Supply** 

Standard Second Pulse Measurement

# **DC Energy Meters Testing Device**

TD1580 is a comprehensive equipment dedicated to the verification and type evaluation of static DC energy meter. which composed of multi-function DC standard source, DC .It is applicable to the verification of direct connected or indirect connected DC energy meters or the completion of most tests of type evaluation.



Accuracy: Class 0.02, Class 0.05

DCV Output:  $10 \text{ mV} \sim 1150 \text{V}/1500 \text{ V}$ ,  $10 \mu \text{V} \sim 4.4 \text{ V(small-signal)}$ 

IDCI Output: 5 μΑ~120 Α/600 Α

DC /AC Output Mode for Ripple Effect Test

Positive and Negative Voltage Output for Reverse Polarity Connection Test

Auxiliary Power Supply for DC Energy Measuring

Loop Current Measurement to Test the Power Consumption

Test the Daily Reckoning Error



### Single-phase Multi-function Standard Meter

TD3100 is a high-precision single-phase standard instrument that can simultaneously measure multiple electrical charges in the loop such as: voltage, current, frequency, phase, harmonics, active power/energy, reactive power/energy, apparent power, power factor, etc.

Accuracy: Class 0.02/ Class 0.05

Voltage Measurement: 6 V~528 V (customizable)

Current Measurement: 1 mA~120 A Frequency: 45 Hz~65 Hz /400Hz 2<sup>nd</sup>~63<sup>rd</sup> harmonic measurement.

Support Comprehensive Statistical Analysis of the

Measured Electricity

Standard Energy Pulse Input/Output



#### TD3250

# Portable Three-phase Energy Meter Tester

TD3250 is a portable standard meter specially used for energy meter on-site test, AC sampling etc. It integrates the functions of electrical parameter measurement, energy meter calibration, connection mode identification, harmonic analysis, waveform display, phasor diagram display, data management.





Accuracy: Class 0.02 / Class 0.05.

3PH Voltage Measurement: 0~480 V.

3PH Current Measurement (Direct): 50 mA~ 12 A. 3PH Current Measurement (Clamp): 100 mA~ 120 A. Support Energy Pulse Optical/Electrical Pulse Input.

ACV Input: 100 V~264 V

### Three-phase Multi-function Standard Meter

TD3310 is a high-precision three-phase standard instrument, which can simultaneously measure multiple electrical parameters in the loop such as: voltage, current, frequency, phase, harmonics, active power/energy, reactive power/energy, apparent power, power factor, etc. in the three-phase Y-shaped/V-shaped wiring mode.

Accuracy: Class 0.01

3PH Voltage Measurement: 6 V~528 V

(customizable)

3PH Current Measurement: 0.2 mA~120 A

Frequency: 45 Hz~65 Hz / 400Hz 2~127th Harmonic Measurement.

Comprehensive Statistical Analysis of the

Measured Electricity

Standard Energy Pulse Input/Output Function.



#### **TD3810**

### Three-phase Energy Device Field Testing System

TD3810 is a comprehensive testing system dedicated to the on-site assessment of the AC energy meter verification device. It can assess the three-phase energy standard device, and be used as a high-precision energy standard meter.





Accuracy: Class 0.01/ Class 0.02

3PH Voltage Measurement: 6 V~528 V

(customizable)

3PH Current Measurement: 0.2 mA~120 A

Frequency: 45 Hz~65 Hz / 400Hz

2 to 127 Harmonic Measurements.

Support the Graphical Display Of Phasor Map,

Spectrum Map and Trend Map


Temperature and Humidity, Magnetic Field,

Daily Timing Error Measurement



### Single-phase Energy Meters Verification Device

TD3500 is applied for verification of single-phase energy meters. It mainly consists of single-phase precision standard power source, verification platform, measurement and control platform, PC(optional) and verification software. TD3500 supports simultaneous verification of  $6 \sim 24$  single-phase electricity/mechanical energy meters with the same voltage/current range, different meter constant.

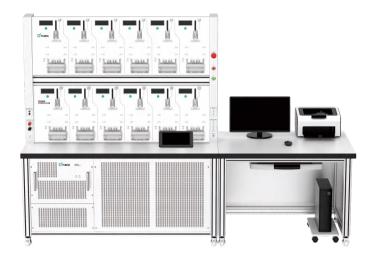

Accuracy: Class 0.05 / Class 0.1

Maximum Output Capacity: 264 V / 120 A.

Frequency: 45 Hz  $\sim$  100 Hz.


Minimum Current Output: 1 mA.

Energy Measurement: Positive / Negative Active and Reactive Energy

Connection: Equipped with Special Pressure Gauge Holder Energy Pulse: Electric and Optical Pulse Sampling Ports Multiple-position Test: Optional 6, 12, 16, 24 positions

### Single-phase Energy Meters Verification Device

TD3550 is a device used to verify new type single-phase energy meters that meet the OIML R46 instruction. It mainly consists of single-phase precision standard power source, test bench, PC(optional) and verification software. It supports simultaneous verification of 6  $\sim$  24 single-phase electricity/mechanical energy meters, smart meters and IOT electricity meter, etc.

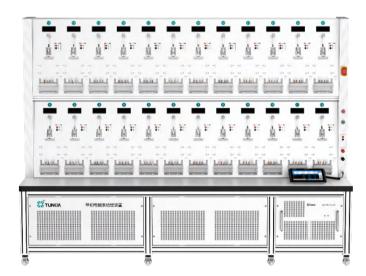

Accuracy: Class 0.05 / Class 0.1

Maximum Output Capacity: 264 V / 120 A

Frequency: 45 Hz ~ 100 Hz

Minimum Current Output: 1 mA.

Energy Measurement: Positive / negative active and reactive energy

Harmonic Output: 2<sup>nd</sup>~63<sup>rd</sup> @50Hz / 60Hz

High Order Harmonic Test Complex Waveform Test

Daily Reckoning Error Test: Built in standard clock tester Multiple-position Test: Optional 6, 12, 16, 24 positions

### Three-phase Energy Meters Verification Device

TD3600 is applied for the verification of new three-phase energy meters. It mainly consists of three-phase precision standard power source, test bench, PC(optional) and verification software. TD3600 Supports simultaneous verification of  $3 \sim 16$  three-phase energy meters with the same voltage/current range, different meter constant.



Accuracy: Class 0.02/Class 0.05.

Maximum Output Capacity: 576 V / 120 A

Frequency: 45 Hz ~ 100 Hz.

Minimum Current Output: 0.2 mA.

Energy Measurement: Positive / negative active and reactive energy.

Daily Reckoning Error Test: Built in standard clock tester.

Connection: Equipped with special pressure gauge holder.

Energy Pulse: Electric and optical pulse sampling ports.

Multi-position Test: Optional 3, 6, 12, 16 positions.

### Three-phase Energy Meters Verification Device

TD3650 is applied for the verification of new three-phase energy meters. TD3650 supports simultaneous verification of 3 to 16 three-phase energy meters (Three-phase electrical meters, Three-phase smart electricity meters, Three-phase smart loT electricity meters, etc.) with the same voltage/current range, different meter constant.



Accuracy: Class 0.02 / Class 0.05.

Maximum Output Capacity: 576 V / 120 A.

Frequency: 45 Hz ~ 100 Hz.

Minimum Current Output: 0.2 mA.

Energy Measurement: Positive / negative active and reactive energy.

Harmonic Output: The  $2^{nd} \sim 63^{rd} @ 50 / 60 Hz$ 

Complex Waveform Test


DC and Even Harmonics test

Energy Pulse: Electric and Optical Pulse Sampling Ports

Multi-position Test: Optional 3, 6, 12, 16 positions.

### Three-phase Standard Energy Meters Verification Device

TD3610 is applied for the verification of three-phase energy reference standard. It can automatically complete the class 0.02 and the following class of R46 AC standard energy meter or AC standard source verification.

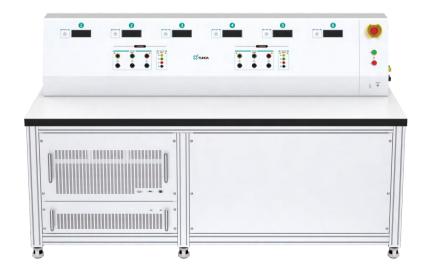

High Accuracy: Class 0.01

High Reliability: output power stability is 0.01% / 2min.

Reliable Quality: Temperature coefficient < 0.5 ppm/K.

Harmonic Output / Measurement:  $2^{nd} \sim 63^{rd} @ 50 \, Hz / 60 \, Hz$ 


Positive / Reverse Sequence Power Metering Functions

Waveform Display, Phase Diagram Display, Stability Test, Change

Curve Drawing, Statistical Analysis Of Data

# **Complex Waveform Testing Device**

TD3760 is an AC power device specially designed for complex waveform current influence test of new AC energy meters. It meets the test requirements of relevant current influence in OIML R46. The device directly outputs complex current waveforms with high stability and accuracy through the three phase precision standard power source, which can complete the following test items.

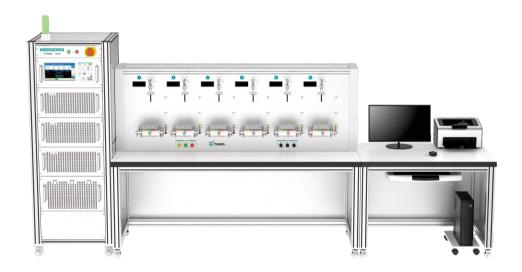

Accuracy: Class 0.05

Impact Test of DC and Even Harmonics

Impact Test of Harmonic in Voltage-current Circuits

Impact Test of Inter-harmonic in the Current Circuits

Impact Test of Odd Harmonic in Current Circuits

High-order Harmonic Test

Burden Current Fast Change Test

Multi-position Test: Optional 3,6,12,16 positions.

# Portable Tester for Three-phase Energy Meters

TD4550 is an intelligent and highly integrated test system for calibrating electrical apparatus. It is built-in 3PH standard source. It can complete intrinsic error test, constant test, standard deviation test, starting current test, test of no-load of electric energy meter.

Accuracy: Class 0.02 / Class 0.05 / Class 0.1

3PH ACV Output :  $6 \text{ V} \sim 456 \text{ V}$ 3PH ACI Output :  $2 \text{ mA} \sim 120 \text{ A}$ 

Multiple Output Mode, Support Three-Phase or

Single Adjust

U-I Phase: 0°~360°, Accuracy 0.01°

2<sup>nd</sup>~21<sup>st</sup> Harmonic Output



#### **TD4100**

# Portable Tester for Three-phase and DC Meters

TD4100 is a multi-function 3PH power source. It integrates AC/DC power output function, harmonic function, transmitter test function, AC energy meter test function. Can be used to calibrate AC/DC voltmeter, AC/DC ammeter, AC/DC power meter, electric energy meter and transmitter, etc.



Accuracy: Class 0.02/Class 0.05

3PH AC Voltage Output: 1 V ~ 825 V 3PH AC Current Output: 2 mA ~ 110 A

Frequency: 45 Hz ~ 70 Hz

U-I Phase :  $0^{\circ} \sim 360^{\circ}$ 

DC Voltage Output :  $5 \, \text{mV} \sim 1100 \, \text{V}$ 

DC Current Output: 1 µA ~ 33 A

AC Energy Meter Test

# Testing Device for Three-phase and DC Meters

TD4200 is a multi-function comprehensive test bench for the calibration of electrical measuring instruments. It integrates precision 3PH standard source, high-precision 3PH standard meter, precision DC standard source, test-bed, computer and special software. Can be used to calibrate three-phase AC/DC meter, AC standard source, AC/DC transmitter, etc



Accuracy: Class 0.01/Class 0.02

3PH Voltage Output:  $0.3 \text{ V} \sim 825 \text{ V}$  3PH Current Output:  $0.3 \text{ mA} \sim 110 \text{ A}$ 

3PH Standard Meter

DC Power Output: 1100 V / 33A or 110A;

Frequency and Phase Adjustable

Harmonic Function / AC Energy Meter Test

# Portable Tester for AC Sampling Devices and Transmitters

TD4500 is a multi-function 3PH power tester, which integrates AC/DC power output function, 3PH measuring function, harmonic function, transmitter test function, U4th voltage output function, AC energy meter test function. It can be used to calibrate AC/DC voltmeter, AC/DC ammeter, AC/DC power meter and transmitter, etc.

Accuracy: Class 0.02/ Class 0.05

3PH ACV Output and Measurement : 6 V  $\sim$  456 V 3PH ACI Output and Measurement : 0.1 A  $\sim$  6.25 A

Frequency: 45 Hz ~ 70 Hz

U-I Phase : 0° ~ 360°


DCV Output:  $10 \text{ mV} \sim 330 \text{ V}$ DCI Output:  $0.1 \text{ mA} \sim 22 \text{ mA}$  $2^{\text{nd}} \sim 21^{\text{st}}$  Harmonic Output



TD4510

# Portable Tester for Three-phase and DC Meters

TD4510 is a multi-function 3PH power tester. It integrates AC/DC power output and measuring function, harmonic function, transmitter test function, U4th voltage output function, AC energy meter test function. It can be used to calibrate AC/DC voltmeter, AC/DC ammeter, AC/DC power meter electric energy meter and transmitter, etc.

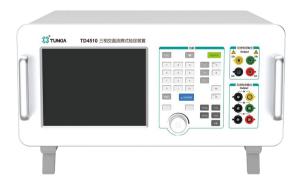

Accuracy: Class 0.02/Class 0.05

3PH ACV Output and Measurement:

6 V ~ 456 V

3PH AC current output/Measurement:

 $20 \text{ mA} \sim 12 \text{ A}/0.1 \text{ A} \sim 6 \text{ A}$ 

Frequency: 45 Hz ~ 70 Hz

U-I Phase : 0° ~ 360°

DCV Output: 10 mV ~ 660 V

DCI Output :  $0.1 \text{ mA} \sim 11 \text{ A}$  $2^{\text{nd}} \sim 21^{\text{st}}$  Harmonic Output

# Portable Tester for Three-phase and DC Meters

TD4520 is a multi-function 3PH power tester. It integrates AC/DC power output function, 3PH measuring function, harmonic function, transmitter test function, U4th voltage output function, AC energy meter test function. Can be used to calibrate AC/DC voltmeter, AC/DC ammeter, AC/DC power meter electric energy meter and transmitter, etc.

Accuracy: Class 0.02/ Class 0.05

3PH ACV Output and Measurement: 6 V ~ 456 V

3PH ACI Output/Measurement:

 $20 \text{ mA} \sim 24 \text{ A}/0.1 \text{ A} \sim 6 \text{ A}$ 

Frequency: 45 Hz ~ 70 Hz

U-I Phase: 0° ~ 360°

DCV Output:  $10 \text{ mV} \sim 660 \text{ V}$ DCI Output t:  $0.1 \text{ mA} \sim 22 \text{ A}$   $2^{\text{nd}} \sim 21^{\text{st}}$  Harmonic Output



#### TD4530

# Portable Tester for Three-phase and DC Meters

TD4530 is a multi-function 3PH power tester. It integrates AC/DC power output function, 3PH measuring function, harmonic function, transmitter test function, U4th voltage output function, AC energy meter test function. Can be used to calibrate AC/DC voltmeter, AC/DC ammeter, AC/DC power meter electric energy meter and transmitter, etc.



Accuracy: Class 0.02/Class 0.05.

3PH ACV Output/Measurement: 1 V ~ 660 V

 $(U_{AB} Max 1100 V) / 6 V \sim 456 V$ 

3PH ACI Output/Measurement: : 20 mA ~ 30 A/

0.1 A ~ 6 A

Frequency: 45 Hz ~ 70 Hz

U-I Phase : 0° ~ 360°

DCV Output: 10 mV ~ 1100 V

DCI Output : 0.1  $\mu$ A ~ 30 A

2<sup>nd</sup>~21<sup>st</sup> Harmonic Output



# Electric Vehicle Charging Station Testing

# Portable Tester for EV DC Charging Station

TD1320 is a portable instrument dedicated to on-site testing of EV( electric vehicles) DC chargers with DCV measurements up to 1150 V, DCI measurements up to 300A, and DC electrical energy available in Class 0.05 / Class 0.1. The instrument can be combined with TK4710 DC resistive load to complete the metrology characteristic test, interoperability test and communication protocol conformance test of DC charging machine.





## TD1330

# Portable Tester for EV AC Charging Station

TD1330 is a portable instrument dedicated to on-site inspection of EV AC charging station, with three-phase AC voltage measurements up to 300 V, three-phase AC current measurements up to 78 A, and AC energy measurement available in Class 0.05 / Class 0.1. The instrument can be combined with TK4720 AC adjustable resistive load to complete the metrology characteristics test and interoperability test of AC charging station.









#### **TK4710**

# DC Adjustable Resistance Load

TK4710 is a DC adjustable resistance load box with a rated power of 60 kW. The panel is equipped with standard DC charging socket, which can be used with DC charger field tester to realize on-site verification of DC charger for electric vehicles.



#### TK4720

# **AC Adjustable Resistance Load**

TK4720 is an AC adjustable resistance load box with rated power single-phase 9kW or three-phase 45kW. The panel is equipped with standard AC charging socket, which can be used with AC charging pile field tester, to realize the on-site verification of AC charger for electric vehicles.



TK4720 - 9 kW



#### TK4960

# DC Charging-Power Calibration Adapter

TK4960 is an interface adapter equipped with two DC charging sockets. It is suitable for metrology laboratories to use existing high precision DC standard power sources to calibrate non-vehicle DC charger testers, such as TUNKIA TD1320 or similar equipment from other manufacturers.





#### TK4965

# **AC Charging-Power Calibration Adapter**

TK4965 is an interface adapter equipped with two AC charging sockets. It is suitable for metrology laboratories to use existing high precision AC standard power sources to calibrate non-vehicle AC charger testers, such as TUNKIA TD1330 or similar equipment from other manufacturers.







# Verification Device for Leakage Current Tester

TD1210 integrates the DC~1MHz wideband constant current standard source, constant voltage standard source, DC ohmmeter, impedance tester, AC voltage standard meter and others. It's applied for calibrating conventional leakage current meter, contact current tester, and medical leakage current tester.

Current Output :  $50 \,\mu\text{A} \sim 55 \,\text{mA}$ 

Voltage Output: 30 mV ~ 31 V

Frequency:  $DC \sim 1 \, MHz$ 

ACV Measurement: 0~300 V

1592 Hz Small Current Source for

Time Constant Test



#### TD1220

# Verification Device for DC High Voltage & High Value Resistor

TD1220 applied to calibrate DC high voltage and high resistor, high voltage resistance case, DC high voltage meter, insulation resistance tester verification device (MOHM meter verification device) etc.



DCV Output: 0~10 kV DCI Output: 0~50 mA

DC RES Measurement :  $100 \Omega \sim 2 T\Omega/10 T\Omega$ 

Accuracy: Class 0.03

Constant Voltage Source (CV) Mode: High

Resistance Measurement

Constant Current Source(CC) Mode: Low

Resistance Measurement

# Verification Device for Withstanding Voltage Tester

TD1230 applied to calibrate AC/DC withstanding voltage tester, withstanding voltage part of safety performance comprehensive tester, withstanding voltage part of insulation withstanding voltage tester and etc.

ACV/DCV Measurement: 100 V ~ 15 kV.

ACI/DCI Measurement: 0.1 mA ~ 250 mA.

Distortion / Ripple and Voltage Duration Time Test

Built-in Adjustable Resistive Load with Fineness of  $1\,k\Omega.$ 

Oscilloscope and Data Statistical Analysis



#### **TD1240**

# Verification Load Bank for Withstanding Voltage Testers

TD1240 is a resistive load bank with 14 sets fixed resistance. It can help calibrate withstanding voltage testers with cooperation of TD1230, and also can be use to calibrate breakdown alarm current and leakage current.



Load Resistance:  $12.5 \text{ k}\Omega \sim 2250 \text{ k}\Omega$ 

Rated Voltage: 2.5 kV~15 kV


Rated Current: 10 mA~200 mA

Max Power: 120VA~600 VA

# Verification Device for Earth Continuity Testers

TD1250 is a precision AC/DC artificial resistance, integrated a AC/DC ammeter. Applied for calibrating earth continuity tester and other AC/DC low resistance instruments. It can calibrate max permissible error, alarm setting error, test current setting error etc.



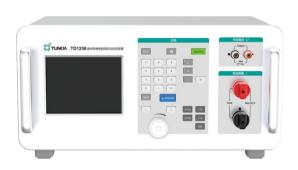

Dc Resistance Simulation:200  $\mu\Omega$  (100  $\mu\Omega$  optional) ~ 20  $\Omega.$ 

AC Resistance Simulation:500  $\mu\Omega$  (300  $\mu\Omega$  optional) ~ 15  $\Omega$ .

AC/DC Current Measurement: 0.5 A ~ 36 A(60A option).

Accuracy: Class 0.02/Class 0.05/Class 0.1.

Harmonic and ripple function.

With data statistics and analysis, stability test function.



# **AC High Voltage Standard Source**

TD2400 is a high-precision and multi-function AC standard high voltage source with wide rang. It's applied for calibrating AC high voltage meter, withstanding voltage testers, high voltage probe etc.

Accuracy: Class 0.02/ Class 0.05

ACV Output: 100 V ~ 5 kV / 10 kV / 15kV

Frequency:  $45 \, \text{Hz} \sim 65 \, \text{Hz}$  $2^{\text{nd}} \sim 11^{\text{th}} \, \text{Harmonic Output}$ 

Short-circuit and Overload Protection



#### **TD2410**

# High Voltage Meters Calibration Device

TD2410 is a high-precision and multi-function AC standard high voltage source with wide rang. It's applied for calibrating AC high voltage meter, withstanding voltage testers, high voltage probe etc.



Accuracy: Class 0.02/ Class 0.05

ACV Output:  $1kV \sim 35 kV$ Frequency:  $45 Hz \sim 65 Hz$  $2^{nd} \sim 11^{th}$  Harmonic Output

High Voltage Switch For Safety

# DC High Voltage Standard Source

TD2500 is a high-precision and multi-function DC standard high voltage source with wide rang. It's applied for calibrating DC high voltage meter, withstanding voltage testers, high voltage probe etc.

Accuracy: Class 0.02 / Class 0.05

DCV Output :  $100 \, \text{V} \sim 5 \, \text{kV} / 10 \, \text{kV} / 20 \, \text{kV} / 50 \, \text{kV}$ 

Short-circuit and Overload Protection





#### TD2550

## Non-touch Static Voltmeters Calibration Device

TD2550 is a high precision, high stability high pressure standard source instrument. It's applied for calibrating non-contact electrostatic voltmeter, high voltage electrostatic voltmeter, DC high voltage meter, high voltage probe etc.



Accuracy: Class 0.05 / Class 0.1

Bipolar DCV Output: 500 V ~ 20 kV /30kV

Equip with Standard Plate Electrode,
Insulated Support, Distance Regulator

Voltage Indicators for Safety Warning

Short-circuit and Overload Protection

# Precision DC High Voltage Meter

TD2600 is a wide range, high-precision DC high voltage meter. It's applied for calibrating DC high voltage source or meter, high voltage probe, etc.

Accuracy: Class 0.02/Class 0.05

DCV Measurement:  $100 \text{ V} \sim 5 \text{ kV/} 10 \text{ kV} / 20 \text{ kV}$ 

 $/50\,\mathrm{kV}$ 

Stability Testing for HV Source, Data Analysis

Short Circuit and Overload Protection



#### TD2650

# Precision AC / DC High Voltage Meter

TD2650 is a wide range, high-precision AC&DC high voltage meter. It's applied for calibrating DC high voltage source or meter, AC high voltage source or meter, high voltage probe, etc.





Accuracy: Class 0.02/ Class 0.05

DCV Measurement:  $100 \text{ V} \sim 5 \text{ kV} / 10 \text{ kV} / 20 \text{ kV} /$ 

50 kV

ACV Measurement:  $100 \text{ V} \sim 5 \text{ kV} / 10 \text{ kV}$ 

Stability Testing for HV Source, Data Analysis

Short Circuit and Overload Protection



# **Process Signal Calibrator**

TD7500 is a handheld thermal instrument and process signal measurement calibration instrument, which can calibrate class 0.1 and below industrial sensors, transmitters, recorders and other thermal process instruments. It can calibrate thermal engineering secondary instruments.

Accuracy: Class 0.05

DCV Output/Measurement: 10 mV~ll V

DCA Output/Measurement: 0.2 mA~24 mA

DC Resistance Simulation: 4  $\Omega$ ~4.8  $k\Omega$ 

DC Resistance Measurement (2-Wire/4-Wire):

4 Ω~4.4 kΩ

6 types of RTD and 8 types of TC.

Auxiliary Power: 24 V Loop Mode Power



**TD7600** 

# **Precision Process Calibrator**

TD7600 is a high-precision thermal meter and process signal meter calibrator. Applied to calibrate process signal calibrators, industrial sensors, transmitters etc. It can calibrate the process signal calibrator of Class 0.01or below.



Accuracy: Class 0.003

DCV Output/Measurement: 10 mV  $\sim$  110 V DCA Output/Measurement: 0.1 mA  $\sim$  110 mA

DC Resistance Simulation/Measurement:  $4 \Omega \sim 4.4 k \Omega$ 

11 types RTD and 12 types TC

Auxiliary Power: 24 V Loop Mode Power

#### T11000

# Precision AC/DC Voltage Calibrator

Tl1000 is an AC\DC voltage source with high stability and precision. it is applied for calibrating digital voltmeters\multimeters on-site, e.g, industrial production lines, etc.

Accuracy: 35ppm/100ppm(DC), 100ppm/200ppm(AC)

ACV\DCV Output: 10 mV ~ 1020 V

Frequency: DC, AC 10 Hz ~ 2 kHz/20 kHz Maximum ACV/DCV Output Power: 10 VA





#### **TI1100**

# Precision AC/DC Current Calibrator

Tll100 is an AC/DC current source with high stability and precision, it is applied for calibrating ammeters on-site, e.g, industrial production lines, etc.





Accuracy: Class 0.01/Class 0.02(DC), Class 0.02/

Class 0.05(AC)

AC\DC Current Output:  $10 \mu A \sim 10.5 A$ Frequency: DC, AC  $10 Hz \sim 2 kHz/10 kHz$ 

Typical Short-term Stability: 0.005%/min/0.01%/min

#### TI1200

# **Precision DC Resistance Calibrator**

Tll200 is a high-precision DC resistance source with wide range, it is applied for calibrating ohmmeter on-site, e.g, industrial production lines, digital multimeters, DC bridges, microhmmeters, etc.

Accuracy: 50 ppm

Resistance Output: 0  $\Omega$  ~ 1100 M $\Omega$ Programmable calibration schemes



TI2100

# High-stable DC High Current Standard Source

TI2100 is a series of high-stability DC high-current standard sources for industrial testing, which adopts a modular design and supports the combined output of multiple sources to adapt application scenarios with different current specifications.





Accuracy: Class 0.01.
DCI Output: N\*1.5 kA

Short-term stability :0.003% \* FS

Maximum Load Voltage: 10 V Unipolar Source/Bipolar Source

Ripple Coefficient: < 0.1%.

#### **TK2600**

# Pulse Voltage Source

TK2600 is a pulse voltage source that the rise and fall time of pulse is less than 10  $\mu$ s, and the step response performance is faster. It is suitable for measuring the response time of current sensor, Roche coil and other equipment, or calibrating pulse shunt, etc.

Pulse Voltage Output: 200 V ~ 2 kV

Pulse Width: 1 ms ~ 10 ms

Rise Time: 10 µs

Rising Edge Falling Edge On-time: 10 ms ~ 10 s

(adjustable)



#### TK2650

# **Pulse Current Source**

TK2650 is a pulse current source that the rise and fall time of pulse is less than  $10 \, \mu s$ , and the step response performance is faster. It is suitable for measuring the response time of current sensor, Roche coil and other equipment, or calibrating pulse shunt, etc.





Pulse Current Output: 500 A
Pulse Width: 1 ms ~ 100 ms

Rise Time: 10 µs

#### TK6500

# Electric Welding Machine AC/DC Power Calibrator

TK6500 is a precision AC-DC power calibrator for on-site calibration, which is suitable for calibrating the internal ammeter and voltmeter without disassembling the welding machine.

Accuracy: Class 0.05 / Class 0.1

ACV/DCV Measurement: 5 V~180 V / 500 V

ACI/DCI Measurement: 10 A~3 kA Frequency: DC, 40 Hz~1 kHz Harmonic Measurement Function Supports Exporting Data Via USB.





#### **TK6700**

# **Electric Welding Machine Calibrator**

TK6700 is a AC/DC welding machine power parameter comprehensive calibrator with built-in high-current precision measurement module and resistance load. It can be used to calibrate the current or voltage of the welding machine without disassembling it.





Accuracy: Class 0.05 / Class 0.1

ACV/ DCV Measurement: 0.1  $V\sim180~V/500~V$ 

ACI/DCI Measurement: 10 A~1 kA.

Frequency: 40 Hz~1 kHz.

2<sup>nd</sup>~18<sup>th</sup> Harmonic Measurement. Supports Exporting Data Via USB.

#### **TP1000**

# **Surface Resistance Tester**

TP1000 is a handheld instrument specially designed to measure surface resistance and electrostatic leakage resistance, while measure ambient temperature and humidity. Users can use one instrument to complete the test requirements of surface resistance and electrostatic leakage resistance of table mats, floor coatings, paint surfaces and containers.

Measurement Uncertainty: 5%

Resistance measurement range:  $10^3 \sim 10^{12} \Omega$ 

Test Voltage: 10 V / 100 V

Temperature Measuring: 0 °C ~ 50 °C

Humidity Measuring: 10 ~ 80 % R·H

Data Storage, Export, Connect To Printers





#### **TP2000**

# Handheld Temperature Humidity Meter

TP2000 is a portable, multi-function temperature and humidity measuring instrument, equipped with a high-sensitivity, high-precision sensor, and applies to quickly measure ambient temperature and humidity.




Temperature Measuring: -30 °C ~ 60 °C

Humidity Measuring: 10 ~ 90 %R·H

Accuracy: ±1 °C / ±5 %R H

Display Backlight

Bluetooth Communication, Data Storage

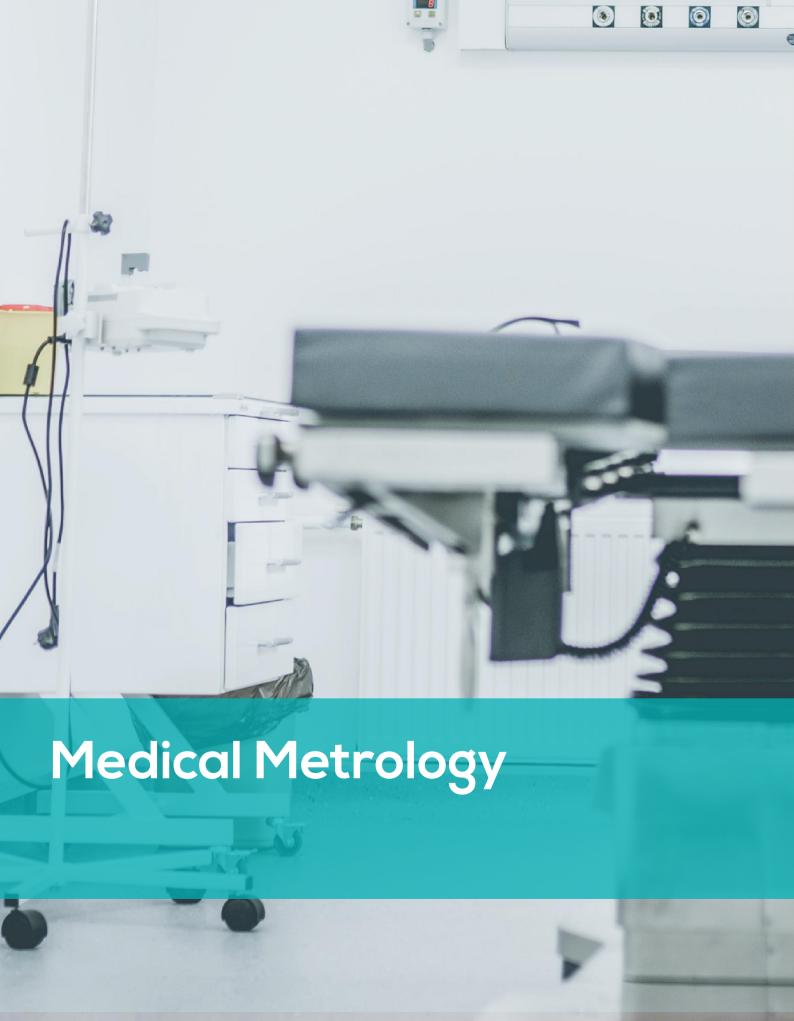

# Calibrator for Electrosurgical Unit Analyzers

TD7200 is an instrument applied to calibrate commercial electrosurgical unit analyzers, which can simulate high-frequency electrosurgical generator to accurately output high-frequency voltage, current, power and other electrical parameters.

Measurement Uncertainty: 0.5% Voltage Output: 10 V~550 V Current Output: 100 mA ~3.3 A High Frequency: 50 kHz~1 MHz

Multi Parameter Display





#### **TD7300**

# Calibrator for Defibrillator Analyzers

TD7300 is a device applied for energy calibration of defibrillator analyzer. It is used for medical equipment manufacturers and medical equipment testing institutions at each level carry out registration inspection, metrological traceability, etc.




Energy Output: 1 J ~ 400 J

Maximum Voltage Output: 3700 V

Discharge Mode: Monophasic Wave (MDS,

MTE), Biphasic Wave (BTE)

Discharge Pulse Duration: about 10 ms~16 ms

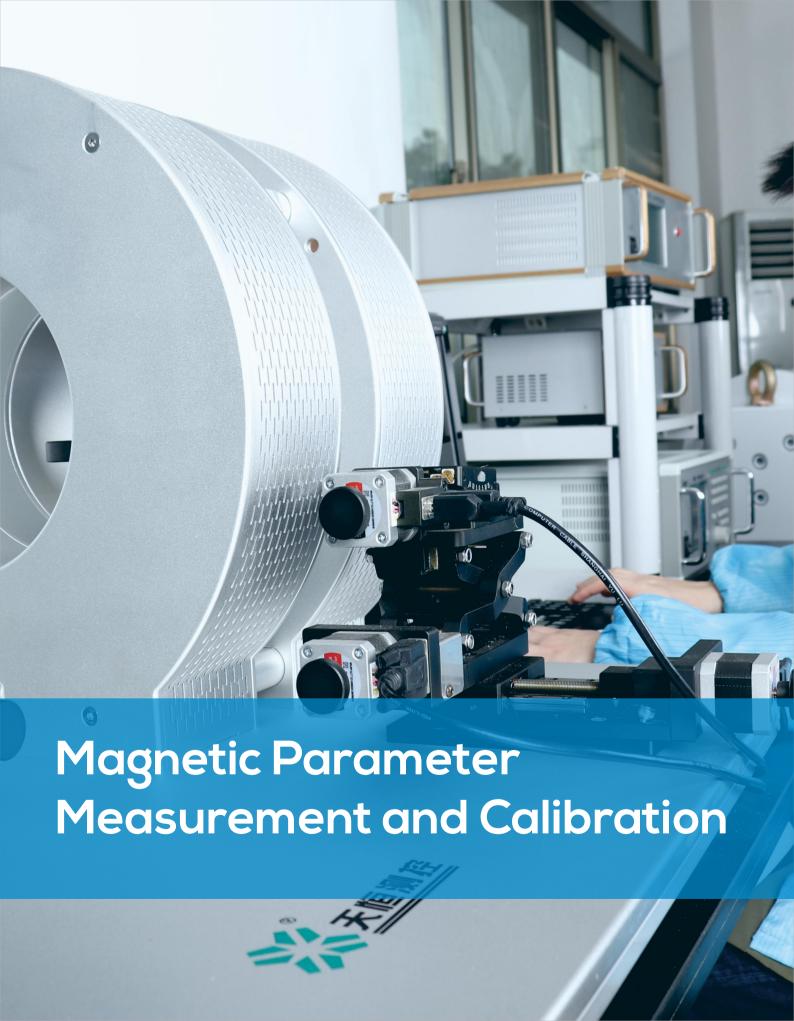

#### TM6140B

# **Precision Magnetometer**

TM6140B is a high-precision, multi-functional magnetic field measuring instrument, equipped with a high sensitivity, low drift Hall sensor and advanced digital signal processing technology. The instrument is applied for measuring the magnetic field density of DC (constant) or AC magnetic field. It can be used as a magnetic field measurement standard to calibrate DC magnetometers.

Measuring Range: 0 ~ 3000 mT.

Accuracy: Class 0.05

Switch between DC or AC Mode.

7-digits Display with a Minimum Resolution of 1 nT.

Unit Switch: G, mT, Oe, A/m.

Probe Temperature Compensation.

RS 232 Output Digital Signal.

Radial and Axial Hall Probes(optional).





#### TM7600

# Digital Integration Flux Meter

TM7600 is a series of high-precision magnetic flux measuring instruments, using advanced digital sampling and integration methods. It overcomes the defects of traditional capacitance-integrated (RC-integrated) flux meters. It provides an effective measurement method for the research and development of advanced magnetic materials and the traceability of magnetic flux value.



Accuracy Class: 0.02, 0.05, or 0.1

The drift is  $0.5 \mu Wb/min$  at 0.05 class.

Unit switch: Wb, mWb, Vs, mVs, Mx.

One-key reset and zero drift.

Class 0.02 support  $\Phi$  (t) and U(t) measurement

curve display.

Saves the voltage zero at the input end of the coil.

Support coil resistance input to eliminate effects.

Digital and analog signal (option) output.

#### TM7900

#### Precision Volt-second Generator For Flux Meter Calibration

TM7900 is a high-precision calibrator for flux meter, which generates magnetic flux by a built-in high-precision Volt-second Generator (IVs=IWb). It calibrates flux meters by comparing indicating value of the value that the flux meter generates. Compared with Mutual Inductance method, volt-second method is featured with easier to use, better precision and traceability, it is applied for calibrate digital flux meter and electrical integrator.

Accuracy: Class 0.005, 0.01, 0.02 or 0.05

Built-in high-precision voltage source and timer.

Generate magnetic flux by integrating voltage and time.

Calculate and output voltage and time by setting magnetic flux value.

Quick calibration in several seconds.

Unit switch: mWb, Wb, Vs, mVs, Mx.

Support setting interior resistance and wire resistance.

Eliminate interior resistance's influence by compensation.





#### **TM9000**

# Calibration System for Magnetometers

TM9000 is a set of high-precision, multi-functional, intelligent magnetic parameter measurement standard device. It is composed of high-precision DC current standard source, standard electromagnet, standard Helmholtz coil, precision magnetometer, magnetic shielding cavity, automatic calibration software, etc. It is suitable for metrology laboratories to set up magnetic field measurement testing standards and calibrate digital or pointer type DC magnetometer.



A standard source of bipolar excitation current equipped with dual channels.

The stability of the current source reaches 30 ppm /min.

Accuracy Class 0.01, the annual error variation is better than 50 ppm.

Adjustment fineness is a minimum of 5ppm.

Magnetic field coil generates a standard magnetic field of  $\pm$  (0.1 mT to 100 mT).

Electromagnets generate a highly stable magnetic field of  $\pm$  (10 mT  $\sim$  2.5 T).

Comes with dedicated calibration software.

#### TM5100

# Handheld Tesla Meter

TM5100 is a portable magnetic field measuring instrument, equipped with a Hall sensor with high sensitivity and low drift, which is suitable for measuring the flux density of DC constant magnetic field.

Measuring Range: 2mT ~ 3000 mT

Accuracy: Class 1, 2 or 5. Unit switch: G, mT, A/m. One-key reset function.

Max. hold function.

N/S polarity display.

Axial and Radial Probe are optional.

USB Interface.



#### TM5100A

# Handheld AC Magnetometer

TM5100A is a portable alternating magnetic field measuring instrument, equipped coil probe, which is suitable for measuring the flux density of AC constant magnetic field, used to calibrate AC magnetic field source, space magnetic field scanning, scientific research, etc.



Measuring Range: 2mT ~ 240 mT.

Accuracy: Class 1 / 2.
Unit Switch: G, mT, A/m.
One-key reset function.

Max. hold function.

Supporting backlight function.

Battery remaining power display.

USB interface.

#### TM5120B

# Handheld Tesla Meter

TM5120B is a portable and multi-functional magnetic field measuring instrument, equipped with a Hall sensor with high sensitivity and low drift. It is applied for measuring the flux density of DC constant magnetic field and AC magnetic field.

Measuring Range: 2mT ~ 3000 mT.

Accuracy:Class 1 or 2.

Switching AC or DC mode

Unit switch: G, mT, A/m.

Max. hold function.

Alarm of exceeding the upper / lower limit.

Axial and Radial Probe are optional.

USB interface.



#### TM5340B

# Handheld Triaxial Tesla Meter

TM5340B is a portable, multi-functional meter that measures magnetic field, equipped with high sensitivity, low drift triaxial Hall sensor. It is applied for measuring the magnetic density value of DC or AC triaxial magnetic field.



Measuring Range: 2 mT~3000 mT.

Accuracy: Class 5.

Measuring XYZ component, vector

synthetic value.

Switching AC or DC mode.

Unit switch: mT, G, A/m.

Max. hold function.

Probe temperature compensation.

USB interface.

#### TM6100

## **Gauss Meter**

TM6100 is a high-precision, multi-functional magnetic field measuring instrument equipped with a high-sensitivity, low-drift Hall sensor. It is applied for measuring the magnetic flux density value of a DC (constant) magnetic field or an alternating magnetic field (optional).

Measuring Range: 2 mT ~ 3000 mT.

Accuracy: Class 0.2 or 0.5.

Optional AC measurement mode.

Unit switch: G, mT, A/m, Oe.

N/S and +/- polarity display.

Measuring parameter correction.

Radial and axial Hall probes are optional.

Digital and analog signal output.



#### **TM6160B**

# AC/DC Tesla Meter

TM6160B is a versatile AC and DC Tesla meter with a maximum magnetic field of 3 T. It can directly measure the DC magnetic field generated by the magnetic field generator, and the AC magnetic field. It is also suitable for the magnetic field measurement in the impact test of the OIML R46.



DC and AC measurement modes.

Measure medium and high DC magnetic fields with a Hall probe.

Measure low AC magnetic fields with a coil probe.

Data statistics, stability analysis functions.

Unit switch: G, mT, Oe, A/m.

+/- polarity display.

Set magnetic field integration period.

Digital and analog signal output.

#### **TM4100B**

# Handheld Fluxgate Magnetometer

TM4100B is a portable meter that measures low magnetic field, equipped with high sensitivity, high linearity, low drift fluxgate sensor, which can measure low magnetic accurately.

Measuring Range:  $0\sim2000~\mu T$ .

Various of probes are optional.

Accuracy: Class 1 or 2. Unit Switch: µT, mG.

Relative measurement mode.

Max. hold function.

N/S polarity display.

USB interface.



#### **TM4300B**

# Handheld Triaxial Fluxgate Magnetometer

TM4300B is a portable, multi-function meter that measures low magnetic field, equipped with high sensitivity, high linearity, low drift triaxial fluxgate sensor, which can measure low magnetic field accurately.



Measuring Range: 0~2000 μT.

Various of probes are optional.

Accuracy: Class 1 or 2.

Unit switch:  $\mu T$ , mG.

Max. hold function.

USB interface.

Measuring XYZ component, vector synthetic value.

Alarm function of exceeding the upper / lower limit.

#### TM4830B

# Fluxgate Magnetometer

TM4830B is a portable, multi-functional weak field measuring instrument, which can be matched with fluxgate sensors of various specifications and measurement ranges, including single-axis and three-axis fluxgate sensors, which can measure the weak magnetic field.

Measuring Range:  $0 \sim 2000 \, \mu T$ , various of probes are optional.

Measure XYZ component value, vector value and angle.

Mainframe voltage measurement up to Class 0.005.

0.0015 % for the ultra-high precision version.

The noise of the low noise version is typically < 6 pTrms / Hz.

Switch 6 / 7 / 8-digits, display.

AC or DC mode, and AC frequency display.

The integration period (refresh rate): 0.5s to 100s.

High-accuracy probes support temperature compensation.



#### **TM7100**

# Handheld Flux Meter

TM7100 is a portable measuring instrument, designed with a high speed microprocessor and a low drift electronic integrator. It's applied for measuring spatial magnetic field or permanent magnet flux  $\Phi$  with types of coils.



Measuring Range: 0.2 mWb $\sim$ 2 Wb.

Accuracy: Class 1 or 2.

Drift after zeroing  $< 2 \mu Wb/min$ 

4-digits display, minimum resolution  $1 \mu Wb$ 

Unit switch: mWb, Mx

Maximum hold function

One-key reset and zero drift

Display support backlight and battery power.

#### TM7500

## Flux Meter

TM7500 is a high-precision magnetic flux measuring instrument, designed with a high-speed microprocessor and a low-drift electronic integrator. It's applied for measuring the magnetic flux  $\Phi$  of space magnetic fields or permanent magnets with types of coils.

Measuring Range:0.2 mWb~2 Wb.

Accuracy: class 0.2 or 0.5.

Drift after zeroing  $< 1 \mu Wb/min$ .

5-digits display, minimum resolution 0.1  $\mu$ Wb.

Unit switch: Wb, mWb, Vs, mVs, Mx.

Maximum hold function.

Alarm of exceeding the upper / lower limit.



# Uniaxial Radial Hall Probe Hall Probe Uniaxial Axial Hall Probe Triaxial Hall Probe Schematic Diagram of Radial Probe Axial Probe

**Radial (transverse) Probe:** usually rectangular, the test area is usually the side of the front, suitable for measuring the surface magnetic field density of permanent magnets, magnetic remanence of mechanical parts, DC constant magnetic field, etc.

**Axial Probe:** usually cylindrical, the test area is the top, suitable for measuring the magnetic field generated by a solenoid or toroidal coil, and scanning the surface magnetic distribution.

**Triaxial Probe:** suitable for measuring the three-dimensional magnetic field, scanning the AC magnetic field in space, monitoring environment magnetic field of the laboratory, etc.

#### TM1200 / TM1230

# Fluxgate Probe





Can be connected with a fluxgate magnetometer to measure the low magnetic field in space. TM1200 is a Uni-axial Fluxgate Probe and TM1230 is a Triaxial Fluxgate Probe.

Types: Micro Probe, High-precision Standard Probe, High-precision Low-noise Probe, Ultra High-precision Standard Probe and Ultra High-precision Low-noise Probe.

#### TM2000 / TM2030

# **Precision Current Source**

TM2000 / TM2030 is a series of precision excitation current sources with high precision, high resolution regulation, high stability and other characteristics. It can be used as excitation power supply of field generator such as Helmholtz coil and solenoid to generate standard magnetic field. It's applied for the influence test of materials, devices and instruments or the calibration of magnetic sensors and other applications.



Single or three channel output are optional.

Current output can produce a magnetic field (±).

Optimal short-term stability is 20ppm/min.

Open loop or closed loop two test modes.

Open loop can set current or magnetic field value output.

Closed loop can realize feedback measurement with magnetic sensor.

Support a variety of value setting and adjustment.

Support cascaded expansion of current or power output.

### TM2300 / TM2330

# Helmholtz Coil

TM2300 / TM2330 is a series of Helmholtz coils. The generated magnetic field has good linearity with the current, and the standard DC magnetic field can be generated with the precise excitation current source.

Calibration of magnetic sensors
Calibration of magnetometers
Electromagnetic interference simulation experiments

Magnetic field influence experiments







Three-dimensional Coil

# TM2400 Solenoid

TM2400 is a series of solenoids, which can be used as a magnetic field generator to match with a precision excitation current source to generate a DC standard magnetic field.



Open-circuit magnetic sample detection
Calibration of a magnetic sensor
Traceability calibration of the magnetometer
Electromagnetic interference simulation experiment
Magnetic field influence test



### TD81 SERIES

# AC Magnetic Properties Measuring System for Soft Magnetic Materials

TD81 Series is AC Magnetic Properties Measuring System for Soft Magnetic Materials. The product design conforms to the standard IEC 60404-6. These series instruments cover frequency range from 20 Hz up to 1 MHz, depending on the selected model. It used for testing the AC magnetic properties and curves of ring core specimen.

Electrical parameters calibration function.

Testing mode: setting H to measure B or setting B to measure Ps.

Testing in full frequency range with good accuracy and repeatability.


Automatically testing with professional software.

Automatically calculating magnetic parameters and curves.

Complete curves drawing and data management functions.

Modular design, easy to upgrade or maintenance.



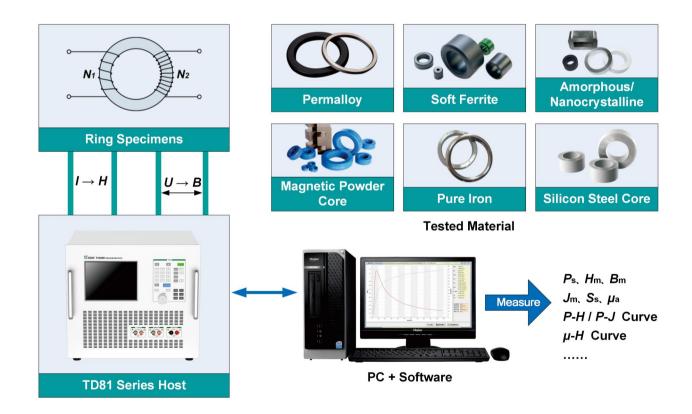

### **TD8160**

# Magnetic Properties Measuring System for Single Sheet Amorphous

Td8160 consists of excitation and measurement host, single sheet tester and computer software, etc. The product design conforms to the standard IEC 60404-16-2018. Testing frequency from 45 Hz to 65 Hz (400 Hz is customizable). It used for testing the AC magnetic properties amorphous or Nano crystalline single sheet.



Electrical parameters calibration function.

Testing mode: setting H to measure B or setting B to measure Ps.

Testing in full frequency range with good accuracy and repeatability.

Automatically testing with professional software.


Automatically calculating magnetic parameters and curves.

Complete curves drawing and data management functions.

Modular design, easy to upgrade or maintenance.

SST is designed as double yoke structure.

Various models of SST are optional, depending on specimen width.

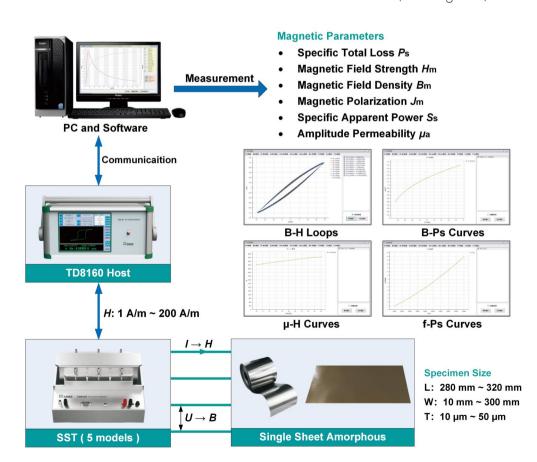

## DC Magnetic Properties Measuring System for Soft Magnetic Materials

TS4000 is DC Magnetic Properties Measuring System for Soft Magnetic Materials. The product design conforms to the standard IEC 60404-4, IEC 60404-7. The complete system contains DC excitation and measurement host, Type A or B Permeameter (optional accessories), solenoid (optional accessories), electromagnet (optional accessories), system level software.





Electrical parameters calibration function.

The specimen is demagnetized using slow amplitude reduction.

Ultra-wide range of current continuously and stably adjustment.

Scanning method doesn't use relay to switch current range.

Support scanning and impact testing method.


A/B Permeameter (optional): apply for open-circuit specimen testing.

Solenoid (optional): apply for Hc of specimen testing.

Modular design, easy to upgrade or maintenance.

Automatically testing by professional softwar

## Type A / B Permeameter

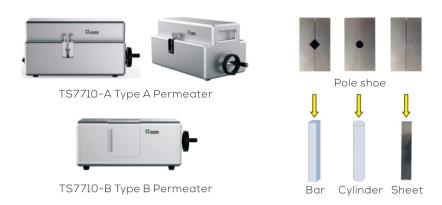

It's applied for testing open-circuit specimen such as bar, cylinder, strip.

Bar specimen cross section: round ( $\Phi$ 10mm), square (10mm×10mm).

Sheet specimen: sheet or strip (width 30 mm).

Users can customize magnetic pole piece according to specimen shape.

Applicable system: TS4000, TS5300, TS1000, TS1300.

## TS7750 Solenoid



It's applied for testing open-circuit specimen such as bar, cylinder, strip.

It's also suitable for generating standard magnetic fields.

Single solenoid, double solenoid, and fluxgate solenoid are optional.


The fluxgate solenoid enables automatic measurement.

Applicable system: TS4000, TS5300, TS1000, TS1300.

# Magnetic Properties Measuring System for Hard Magnetic Materials

TY1000 design conforms to the standard IEC 60404-5, IEC TR 61807:1999. It consists of excitation and measurement host, electromagnet, magnetic measurement sensors, computer software, etc. It is suitable for measuring the magnetic properties of various types of hard magnetic materials and drawing hysteresis loops and curves. TY1000 has the advantages of convenient operation, fast measurement, good repeatability and high reliability.



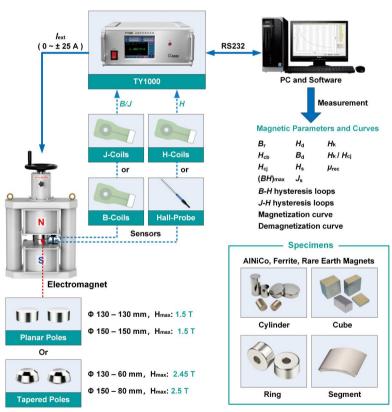

**Room Temperature Measurement Solution** 








High Temperature Measurement Solution (optional)

## Magnetic Properties Measuring System for Hard Magnetic Materials

TY1100 design conforms to the standard IEC 60404-5, GB/T 3217-2013. It consists of excitation and measurement host, electromagnet, magnetic measurement sensors, computer software, etc. It is suitable for measuring the magnetic properties of various types of hard magnetic materials and drawing hysteresis loops and curves.



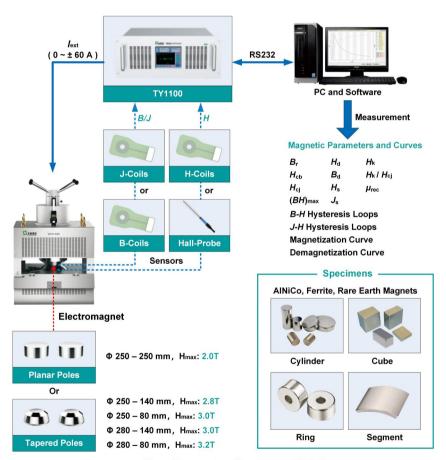

**Room Temperature Measurement Solution** 








High Temperature Measurement Solution (optional)

# Electromagnet

TY1500 electromagnet can install different specifications of pole heads and excite with DC current source. It can produce a large and continuously adjustable magnetic field, with good uniformity and linearity. The electromagnet can be used as an excitation device for permanent magnet samples, to detect their magnetic properties. TY1500 electromagnet has a low input power / magnetic field, and features low carbon, environmental protection and energy-saving.

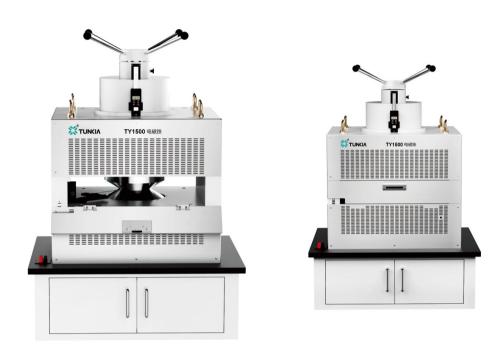

Various of poles are available on request.

Electromagnet excited by current source generates large magnetic field.

Use for testing magnetic properties of hard magnetic materials.

Natural cooling, without external water cooler for heat dissipation.

Automatic lifting poles function is optional (only 250 mm or 280 mm poles).

## Pole of Electromagnet

TY1550 is usually used as an accessory of the electromagnet and installed inside it. And excited by a stable DC current source, it can generate a large area of uniform magnetic field at the center of the two pole faces. It can be used for magnetization and demagnetization of permanent magnet specimen, magnetic property testing, and magnetic field calibration with a standard Tesla meter.



Poles are accessories installed in electromagnet.

Excited by current source generates large magnetic field.

Use for testing magnetic properties of hard magnetic materials.

The pole diameter of planar pole is equal to its pole face diameter.

The pole diameter of tapered pole is larger than its pole face diameter.

Heating poles can be heated by TY1900 Specimen Heating Device.

Thermocouples are inserted in the heating poles for temperature measurement.

Segment poles need to customized according to the specimen.

**TY1700** 

### **Search Coils**



TY1700 can be used as an accessory of the permanent magnet material testing system. Users can choose coils of different sizes or high-temperature coils according to testing requirements. The turn area of the coil is calibrated by a high class magnetic measurement standard.

Search Coils are accessories of magnetic properties measuring system for hard magnetic materials such as TY1100 or Ty1100.

Search Coils used for measurement of the magnetic field strength H or magnetic field density B or magnetic polarization  ${\sf J}$ .

Including H-coils, B-coils, J-coils, BH-coils and JH-coils.

Select proper coils according to the specimen size or testing requirement.

## **Specimen Heating Device**

TY1900 is a device used for heating the poles of electromagnet. It can be combined with TY1000 or TY1100 to form permanent magnet comprehensive testing system, for measuring the magnetic properties of hard magnetic materials at high temperature.



Max. temperature is up to 220°C, and heating time is short.

Dual-channel for heating 2 poles of electromagnet.

Thermocouples are inserted in poles for temperature measurement.

High stability, small size, easy to operation.

Various of heating poles and HT coils are available.

## Surface Magnetic Field Automatic Testing System

TY2000 is a special equipment for measuring the magnetic field distribution of permanent magnet materials and motor rotor surface. It can measure surface magnetic parameters and draw surface magnetic curve of ring specimens, including X-Y rectangular magnetic field distribution diagram, polar coordinate magnetic field distribution diagram, three-dimensional magnetic field distribution diagram, etc.












### Measuring Ring Specimens :

It can test cylindrical permanent magnets, multi-pole magnetic rings, magnetic tiles, small motor rotors, etc.

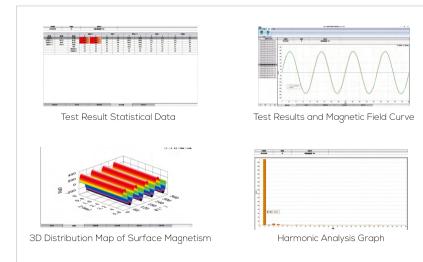



Test Results and Polar Coordinate Graph

## Surface Magnetic Field Automatic Testing System

TY2100 is a special equipment for automatically measuring the magnetic field distribution of permanent magnet materials and motor rotor surface. It can automatically scan specimens surface in three-dimensional and calculate the surface magnetic field distribution.















It can test cylindrical permanent magnets, multi-pole magnetic rings, magnetic tiles, small motor rotors, etc. of different sizes.









Test Result Statistical Data




Test Results and Magnetic Field Curve



Test Results and Polar Coordinate Graph



3D Distribution Map of Surface Magnetism



Harmonic Analysis Graph

## Magnetic Moment Tester

TY3000 is a precision magnetic moment measuring instrument. It is designed with a high-speed microprocessor and a low-drift electronic integrator. It can be used with various specifications of magnetic moment measurement coils to measure the magnetic moment M and magnetic flux  $\Phi$  of magnetic parts such as permanent magnet materials, aluminum-nickel-cobalt, neodymium-iron-boron, and samarium-cobalt. Reference standard: IEC 60404-14:2002 "Methods of measurement of the magnetic dipole moment of a ferromagnetic material specimen by the withdrawal or rotation method"



Measuring Range: 0.2mWb ~ 2 Wb.

Accuracy: Class 0.2, Class 0.5.

Minimum Resolution: 0.1 μWb (range: 2mWb)

The drift after zero adjustment is very small,  $< 1 \,\mu\text{Wb/min}$ .

5 Digit Display, the minimum resolution  $< 0.1 \mu Wb$ .

Optional units: Wb, Vs, Wb·cm, Vs·cm.

Automatically calculate the magnetic moment M according to the coil constant.

Support digital and analog signal (option) output mode.

## High-precision Magnetic Moment Tester

TY3100 is a high-precision magnetic moment measuring instrument. It is designed with a high-speed microprocessor and a low-drift electronic integrator. It can be used with various specifications of magnetic moment measurement coils to measure the magnetic moment M and magnetic flux  $\Phi$  of magnetic parts such as permanent magnet materials, aluminum-nickel-cobalt, neodymium-iron-boron, and samarium-cobalt. Reference standard: IEC 60404-14:2002 "Methods of measurement of the magnetic dipole moment of a ferromagnetic material specimen by the withdrawal or rotation method"



Measuring Range: 0.0Wb ~ 99999 Wb.

Accuracy: Class 0.1, Class 0.05.

Minimum Resolution: 10nWb

The drift after zero adjustment is very small,  $< 0.5 \,\mu\text{Wb/min}$  (Class 0.05)

Optional units: Wb, Vs, Wb·cm, Vs·cm.

Support coil resistance input to eliminate the influence on the measurement.

Automatically calculate the magnetic moment M according to the coil constant

Support digital and analog signal (option) output mode.

## **Magnetic Declination Tester**

TY3300 is a system dedicated to measuring the magnetic declination of permanent magnet materials. It is suitable for measuring three magnetic flux components of permanent magnet materials on the XYZ axis: X, Y, Z, and automatically calculates the magnetic moments MX, MY, MZ, total magnetic moment M, and magnetic declination of the three-axis components.Reference standard: IEC 60404-14:2002 "Methods of measurement of the magnetic dipole moment of a ferromagnetic material specimen by the withdrawal or rotation method"







Measurement range: 0.2 mWb ~1 Wb

The drift after zero adjustment is very small,  $< 1 \,\mu\text{Wb/min}$ .

5 Digit Display, the minimum resolution < 0.1  $\mu$ Wb.


Measuring XYZ axis magnetic flux vector components and composite values.

Each Helmholtz coil is equipped with a movable loading slider.

Optional units: Wb, Vs, Wb·cm, Vs·cm.

Automatically calculate the total magnetic moment and component magnetic moment according to the set coil constant.


Support digital and analog signal output.

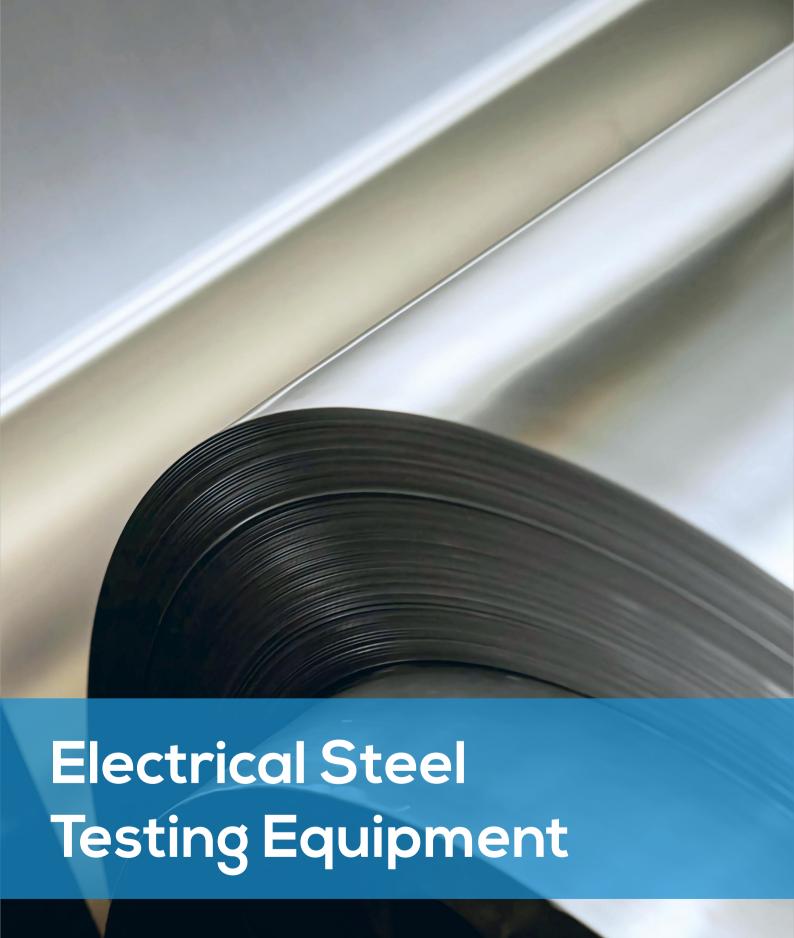

### TD9100

## Online Testing System for Magnetic Properties of Silicon Strip

TD9100 is a system dedicated to online real-time testing of magnetic properties of cold-rolled silicon steel. Through rapid magnetization and measurement of steel strips running on the production line, combined with real-time collected thickness, speed, stress and other signals, it is converted into iron loss, Measurement results of magnetic field strength, magnetic flux density, etc. 7\*24-hour automatic uninterrupted detection provides accurate and effective testing and evaluation help steel mills to carry out quality control, model selection, and improvement of process level.

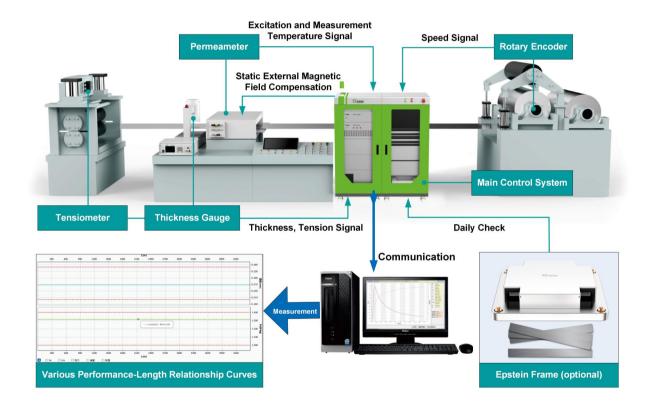

The measurement of magnetic field strength has two options: current method (M.C method) and magnetic field coil method (H-Coil method).

The iron loss measurement cycle is shortened to 100 ms.


ITesting Ps or Bm of steel strip, and drawing hysteresis loop, P-L or  $\delta$ -L curves.

The software can set the upper and lower limits of loss or thickness, and the test data will give a warning if the test data exceeds the limit.

Standard square ring can be configured for daily verification of instrument loss, magnetic field strength, and magnetic flux density measurement accuracy.

## DC Magnetic Properties Measuring System for Electrical Steel

TS1000 is a special instrument for measuring the DC magnetic properties of electrical steel. It consists of excitation and measurement host, Epstein frame, solenoid (optional), A/B type Permeameter(optional), computer software, etc. It is suitable for comprehensive analysis of DC magnetic characteristics of electrical steel.

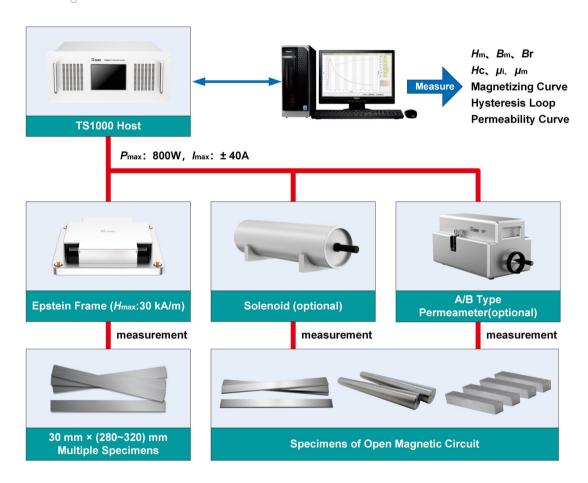

Electrical parameters calibration function.

Maximum magnetization field reaches 30 kA/m (700 T Epstein frame).

Slowly reduce amplitude demagnetization for specimen.

Ultra-wide range of current continuously and stably regulated.


Software controlled automatic measurement.

Automatic calculates magnetic parameters and curves.

Modular design, easy to upgrade or maintenance.

# DC Magnetic Properties Measuring System for Yoke Steel

TS1020 is a special instrument for measuring the DC magnetic properties of yoke steel. It consists of excitation and measurement host, Epstein frame, solenoid (optional), A/B Type Permeameter(optional) computer software, etc. It is suitable for comprehensive analysis of DC magnetic characteristics of yoke steel.

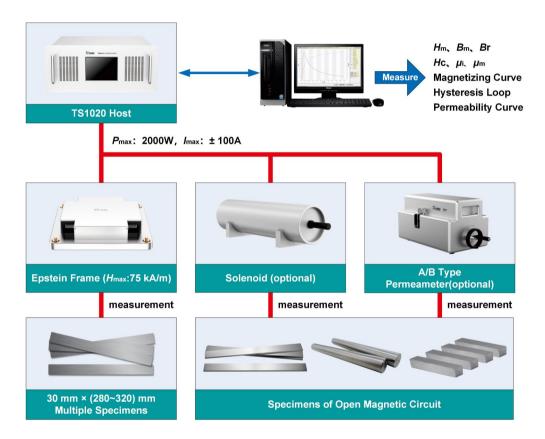

Electrical parameters calibration function.

Maximum magnetization field reaches 75 kA/m (700 T Epstein frame).

Slowly reduce amplitude demagnetization for specimen.

Ultra-wide range of current continuously and stably regulated.


Software controlled automatic measurement.

Automatic calculates magnetic parameters and curves.

Modular design, easy to upgrade or maintenance.

## AC Magnetic Properties Measuring System for Electrical Steel

TS1100 is a special instrument for measuring the AC magnetic properties of electrical steel. It consists of excitation and measurement host, Epstein frame, Single Sheet Tester (optional), computer software, etc. It is suitable for comprehensive analysis of AC magnetic characteristics of electrical steel or core.

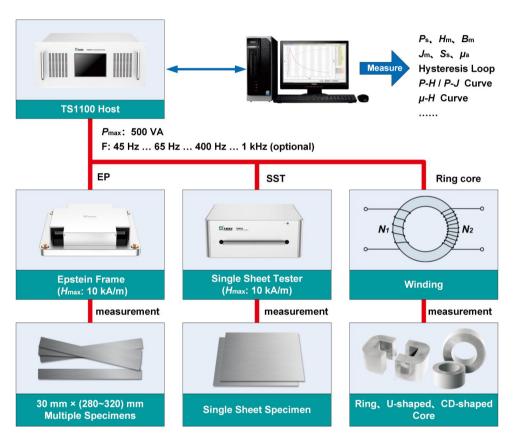

Electrical parameters calibration function.

Measurement Frequency Range: 45Hz~lkHz

Measurement of magnetic field by M.C.

Maximum magnetization field reaches 10 kA/m (700 T Epstein frame).

Slowly reduce amplitude demagnetization for specimen.

Software controlled automatic measurement.


Automatic multi-point measurement.

The software has been configured with multiple measurement schemes

Automatic calculates magnetic parameters and curves.

### AC Magnetic Properties Measuring System for Electrical Steel

TS1200 is a special instrument for measuring the AC magnetic properties of electrical steel. It consists of excitation and measurement host, Epstein frame, Single Sheet Tester (optional), computer software, etc. It is suitable for comprehensive analysis of AC magnetic characteristics of electrical steel or core.

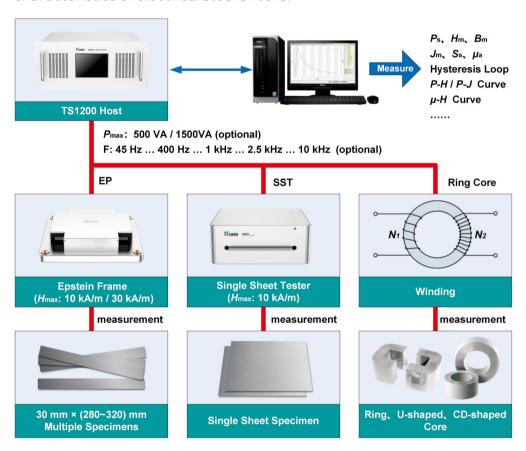

Electrical parameters calibration function.

Measurement Frequency Range: 45Hz~10kHz

Measurement of magnetic field by M.C and H-Coil (optional).

Maximum magnetization field reaches 30 kA/m (700 T Epstein frame).

2 ~ 63 harmonics influence measurement (optional).

Slowly reduce amplitude demagnetization for specimen.


Software controlled automatic measurement.

Automatic multi-point measurement.

Automatic calculates magnetic parameters and curves.

# AC/DC Magnetic Properties Measuring System for Electrical Steel

TS1300 is a special instrument for measuring the AC/DC magnetic properties of electrical steel. It consists of excitation and measurement host (AC and DC), Epstein frame, Single Sheet Tester (optional), computer software, etc. It is suitable for comprehensive analysis of AC magnetic characteristics of electrical steel or core.

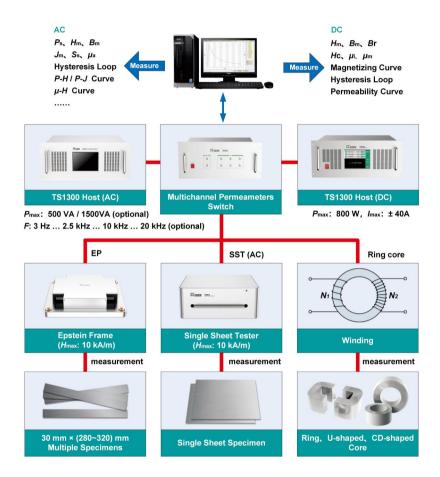

Electrical parameters calibration function.

Measurement of magnetic field by M.C and H-Coil (optional).

Maximum magnetization field reaches 30 kA/m (700 T Epstein frame).

The maximum frequency can be selected to 20kHz.

2 ~ 63 harmonics influence measurement (optional).

The software has been configured with multiple measurement schemes.


Automatic multi-point measurement.

Ultra-wide range of current continuously and stably regulated.

Switch the Permeameter by software without repeated wiring.

## Rotational Magnetic Properties Measuring System for Electrical Steel

TS2000 is a special instrument for measuring orientation (full angle) magnetic properties of electrical steel sheet. The magnetic properties of the specimens can be measured within a certain frequency range from 0° to 360°.

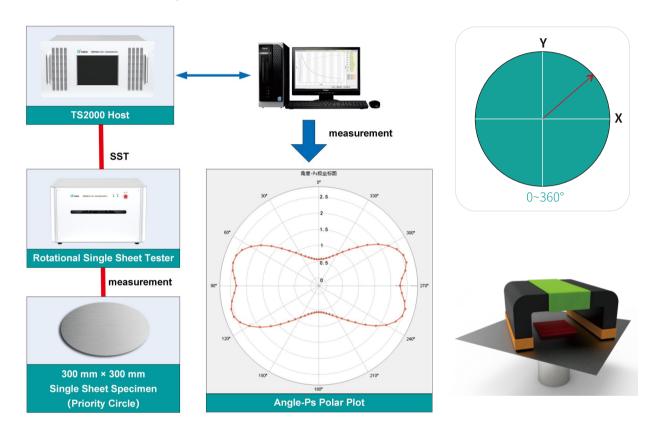

Electrical parameters calibration function.

Operators only need to insert a single specimen into the Permeameter to test.

Measurement of magnetic field by M.C and H-Coil

Slowly reduce amplitude demagnetization for specimen.

Software controlled automatic measurement.


The software has been configured with multiple measurement schemes

Automatic calculates magnetic parameters and curves.

Modular design, easy to upgrade or maintenance.

# Magnetic Properties Measuring System for Electrical Steel Cores

TS2500 consists of excitation and measurement host, automatic measurement software. It can automatically measure the iron loss and other magnetic parameters of the motor stator core or other types of electrical steel core within a certain frequency range

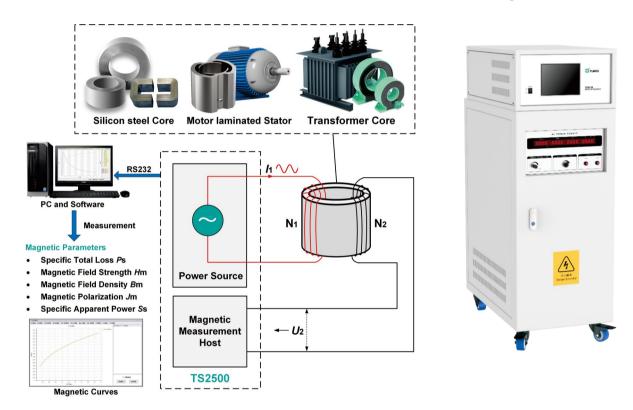

Electrical parameters calibration function.

Testing frequency: 50Hz or 60Hz (400Hz . 1kHz is optional).

Testing mode: setting H to measure B or setting B to measure Ps.

Testing in full frequency range with good accuracy and repeatability.

Automatically testing with professional software.

Automatically calculating magnetic parameters and curves.

Complete curves drawing and data management functions.

Multi-strand wire is customizable to simplify winding process.

### Iron loss Fast Tester for Electrical Steel Sheets

TS2600 is an instrument used to quickly measure the AC magnetic properties of electrical steel sheets. It can quickly measure Ps of electrical steel sheets.



Measurement Frequency Range: 45Hz~400Hz

It can quickly measure the loss of multiple points.

It can display a variety of magnetic parameters, including Ps, Jm, Hm.

The user only needs to press the sheet tester under specimens to measure.


Supports one-click storage and viewing of measurement data, including test date and time.

Equipped with large size LCD touch color screen.

## Magnetic Properties Multifunction Measuring System for Electrical Steel

TS3000 is a special instrument for measuring the AC/DC magnetic properties of electrical steel under different temperature conditions. It consists of excitation and measurement host (AC and DC), several high temperature Epstein frames, single sheet tester (optional), Permeameter program-controlled switching device, temperature controller, automatic measuring software, etc.



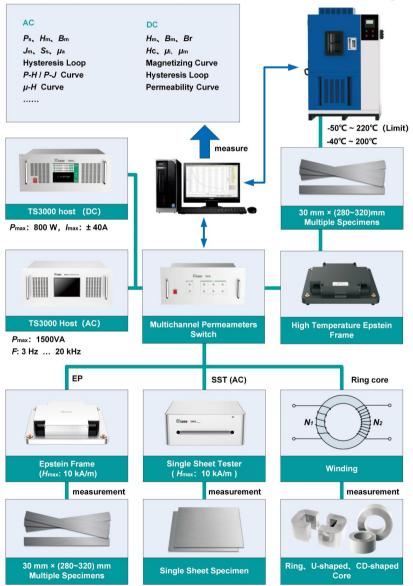

## Surface Insulation Resistance Measuring System for Electrical Steel

TS1700 is a special instrument for measuring the insulation resistance of electrical steel sheet. The instrument supports manual turning over to measure the interlayer resistance of electrical steel. The reference standard is IEC60404-11.



Built-in DC stabilized power supply and precision current measurement unit, the measurement uncertainty is up to 0.1%.

It consists of 2 auger bits, 10 metal rods with contacts, and pressure devices.

It can drive the sample to move back and forth to find multiple different test areas and obtain multiple sets of test data. I to 5 groups of test points can be set.

Equipped with standard resistance circuit board for daily verification of the system.

Set test parameters through LCD touch screen, observe test status and results, easy to use.


# Surface Insulation Resistance Automatic Measuring System for Electrical Steel

TS1710 is a special instrument for measuring the surface insulation resistance (single-sided) or interlayer resistance (double-sided) of electrical steel sheets. The reference standard is IEC60404-11



Silicon Steel Sheet (1000 mm ~ 1200 mm) x 200 mm



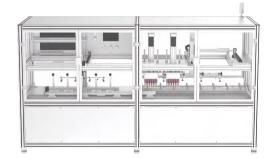

Fully automatic feeding - turning over - testing - data uploading - unloading.

Automatically measure five different test areas, the front and back sides do not overlap. 24 hours of uninterrupted operation.

The conventional method is manual feeding, and AGV and other feeding methods can be customized.

 $\label{precisionDC} \textbf{Built-in precision DC stabilized power supply and precision DC current measurement unit.}$ 

Equipped with standard resistance circuit board for daily verification of the system.

### Stacking Factor Measuring System for Electrical Steel Sheets

TS1780 is a special instrument for measuring the stacking factor of electrical steel sheet. It is mainly composed of precision electronic balances, metal splints, pressure pump, length measuring devices, and computer software. Reference standard: IEC 60404-13, GB/T 19289-2019, ASTM 719/719M, etc.



The pressure pump applies a pressure of about 1Mpa to the stacked sample.

Accurately measuring the height of the two diagonal points of the stacked sample, and automatically transmits it to the computer.

Multiple sets of sample information can be entered in advance to realize batch testing.

Measuring the sample length, width, stacking height, mass, density and other data, and calculating the stacking coefficient f.

After the software test is completed, the test report can be export or printing.

## Bending Testing System for Electrical Steel Sheets

TS1800 is a special instrument for bending testing of electrical steel sheet. It can test the performance of electrical steel sheet under plastic deformation in repeated bending. Reference standard: IEC TR 63114,YB/T 4731-2019.



Silicon Steel Sheet  $30 \text{ mm} \times (300 \pm 20) \text{ mm}$ 

Quick clamping of electrical steel sheet.

The device can be easily fixed on the desktop by tightening screws and a vise at the bottom.


The bending radius of the lower clamp is  $5 \, \text{mm}$ , and the bending radius is not less than  $\pm 90^{\circ}$ .

The upper spring can exert stable tension on electrical steel sheet.

The number of bends can be displayed.

## Bending Automatic Testing System for Electrical Steel Sheets

TS1810 is a special instrument for bending automatic testing of electrical steel sheet. It can fully automatically test the performance of electrical steel sheet under plastic deformation in repeated bending. Reference standard: IEC TR 63114, YB/T 4731-2019.

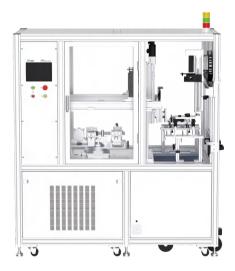



Silicon Steel Sheet 30 mm x (300 ± 20) mm

Fully automatic feeding - testing - data uploading - unloading.

The bending times can be set in the range of  $0\sim9999$ .

The counter displays the bending times in real time, and stops automatically after reaching the set times.

It can automatically judge whether the bent sample is cracked or broken (optional).

24 hours of uninterrupted operation.

The conventional method is manual feeding, and AGV and other feeding methods can be customized.

### TS7000 / TS 7010 / TS7020 / TS7100

## **Epstein Frame**





The Epstein frame is an accessory of magnetic properties measuring system for electrical steel , E.g. TS1000 / TS1020 / TS1100 / TS1200 / TS1300 / TS3000.

The size of the tested specimens is 30 mm (W)  $\times$  (280  $\sim$  320) mm (L).

There are regular, medium frequency, high frequency, high temperature and other Epstein frame.

Magnetic field measurement methods: M.C and H-coil.

The built-in coil of air flux compensation conforms to IEC60404-2 or IEC60404-10 standards.

The cutting and placement of specimens shall comply with IEC60404-2.

### TS7500 / TS7510

# Single Sheet Tester





The Single sheet tester is an accessory of magnetic properties measuring system for electrical steel, E.g. TS1100 / TS1200 / TS1300 / TS3000.

The Single sheet tester can measure the magnetic properties of Single sheet specimens of various sizes.

Single sheet tester with basic edition, upgrade edition and multiple sizes is available.

The Single sheet tester of upgrade edition adds yoke loss winding and demagnetization winding.

Magnetic field measurement methods: M.C and H-coil.

 $The \ upgraded \ monolithic \ magnetometer \ adds \ yoke \ loss \ winding \ and \ demagnetization \ winding.$ 

The cutting and placement of specimens shall comply with IEC60404-3.



**Contact sales** 

Tel +86-731-84930888 Fax +86-731-84930990 E-mail sales@tunkia.com Web www.tunkia.cn

Add. NO. 16 Panpan Road, Changsha, Hunan, China

#### Contact service

Tel +86-731-84930999 E-mail service@tunkia.com

In view of the continuous updating and upgrading of products, in case of any change in the technical indicators here, the actual contract shall prevail